

**Thermal Emission Imaging System**  
2001 Mars Odyssey

**THEMIS STANDARD DATA PRODUCTS  
SOFTWARE INTERFACE  
SPECIFICATION**

October 1, 2022

# Thermal Emission Imaging System 2001 Mars Odyssey

## THEMIS STANDARD DATA PRODUCTS SOFTWARE INTERFACE SPECIFICATION

Prepared by:

\_\_\_\_\_  
**Kimberly C. Murray** Date  
THEMIS Data Archivist

Approved by:

\_\_\_\_\_  
**Philip R. Christensen** Date  
THEMIS Principal Investigator

\_\_\_\_\_  
**Greg L. Mehall** Date  
THEMIS Instrument Manager

\_\_\_\_\_  
**Noel S. Gorelick** Date  
THEMIS Principal Systems Programmer

\_\_\_\_\_  
**R. Stephen Saunders** Date  
Mars Odyssey Project Scientist

\_\_\_\_\_  
**Betty J. Sword** Date  
PDS Mars Data Engineer

April 1, 2022

## DOCUMENT CHANGE LOG

Date	Description	Sections affected
10/01/01	Initial draft	All
02/25/02	Response to PDS Imaging Node review	All
04/01/02	Response to PDS Imaging Node review; QUBE label corresponds with SFDU2CUBE V-1.45	Most
05/31/02	Response to PDS Imaging Node review and external content review; QUBE label corresponds with SFDU2CUBE V-1.50	Most
07/24/02	Revision of TIME keywords in all labels; revision of IREDR CORE_NULL value; revision of RDR label; revision of center corresponds of the VIS filters; QUBE label corresponds with SFDU2CUBE V-1.54	Section 2.3.3; Appendices
10/01/02	Revision of IR-RDR QUBEs calibration (V-4.5) and data format; QUBE label corresponds with SFDU2CUBE V-1.54	Sections 2.2, 3.2; Appendices
01/01/03	Response to PDS Peer Review Addition of IR-BTR and VIS-ABR as Standard Data Products	Title and most sections
	Revision of EDR QUBE headers corresponds with SFDU2CUBE V-1.56; revision of RDR QUBE headers corresponds with IR calibration V-4.6 and VIS calibration V-1.0	Appendices
	Addition of ERRATA_ID history objects	Appendix A.6
04/01/03	Revision of IR-RDR QUBE format; revision of VIS-RDR History Object	Section 3.2; Appendices
07/01/03	Revisions to timing keywords corresponds with SFDU2CUBE V-1.59; revision of VIS-RDR History Object	Section 2.3.4, Appendices
10/01/03	Addition of geometry source keyword to BTR and ABR images	Appendices
10/01/04	Complete reference available for THEMIS document [6]	Section 1.3
07/01/05	Revision of VIS-RDR History Object	Appendices A.4 and A.8
12/01/06	Revisions to IR-EDR headers corresponds with SFDU2CUBE V1.67	Section 2.1 and Appendices
01/01/07	Revisions to IR-RDR and BTR headers corresponds to IR calibration V-5.0	Appendices
07/01/09	Addition of spacecraft orientation keywords	Appendices
04/01/14	Addition of keywords to BTR and ABR headers	Appendices
04/01/16	Band selection for ABR images	Section 2.2
04/01/22	Addition of SCLKERNEL keyword to headers	Appendices
10/01/22	Revision to IR-RDR file format corresponds with product version 2.0	Section 2.3.2 and Appendices A.3 and A.7

# CONTENTS

DOCUMENT CHANGE LOG .....	III
CONTENTS.....	IV
1. INTRODUCTION .....	1
1.1 Purpose and Scope .....	1
1.2 Contents .....	1
1.3 Applicable Documents and Constraints.....	1
1.4 Relationships with Other Interfaces.....	2
2. DATA PRODUCT CHARACTERISTICS AND ENVIRONMENT .....	2
2.1 Instrument Overview .....	2
2.2 Data Product Overview.....	3
2.3 Standards Used in Generating Data Products .....	4
2.3.1 PDS Standards .....	4
2.3.2 QUBE Object.....	4
2.3.3 IMAGE Object.....	6
2.3.4 Time Standards .....	6
2.3.5 Coordinate Systems .....	7
2.3.6 Orbit Numbering Conventions.....	7
2.4 Data Product Contents .....	7
2.4.1 Data Processing Level.....	7
2.4.2 Data Product Generation.....	7
2.4.3 Data Product Archive.....	8
2.4.4 Labeling and Identification .....	8
3. DETAILED DATA PRODUCT SPECIFICATIONS .....	9
3.1 Data Product Structure and Organization .....	9
3.2 Data Format .....	9
3.3 Labels.....	10
3.3.1 File Identification and Structure Label .....	10
3.3.2 HISTORY Object Structure.....	10
3.3.3 Telemetry Table Object Structure.....	11
3.3.4 QUBE Object Label.....	11
3.3.5 IMAGE Object Label.....	11
4. APPLICABLE SOFTWARE.....	11
4.1 Utility Programs.....	11
4.2 Applicable PDS Software Tools .....	12
A. APPENDICIES .....	13
A.1 Example Label: IREDR .....	13
A.2 Example Label: VISED.....	15
A.3 Example Label: IRRDR.....	17

A.4 Example Label: VISRDR..... 20  
A.5 Example Label: IRBTR ..... 22  
A.6 Example Label: VISABR..... 22  
A.7 Label Keyword Descriptions ..... 24  
A.8 HISTORY Object Items and Examples ..... 35  
A.9 Telemetry Table Structure (t1m.fmt)..... 38

**ACRONYMS**

ABR	Apparent Brightness Record
ASU	Arizona State University
BTR	Brightness Temperature Record
DN	Data Number
EDR	Experiment Data Record
IR	Infrared
IRIS	Infrared Imaging System
IRS	Infrared Subsystem
ISIS	Integrated Software for Imaging Spectrometers
JPL	Jet Propulsion Laboratory
NASA	National Aeronautics and Space Administration
PDS	Planetary Data System
RDR	Reduced Data Record
ODY	2001 Mars Odyssey
SBRS	Santa Barbara Remote Sensing
SFDU	Standard Formatted Data Unit
SIS	Software Interface Specification
TDI	Time-Delay Integration
TE	Thermal Electric
THEMIS	Thermal Emission Imaging System
TLM	Telemetry
VIS	Visible

# 1. INTRODUCTION

## 1.1 Purpose and Scope

The purpose of this Data Product SIS is to provide users of the Thermal Emission Imaging System (THEMIS) Visible and Infrared standard data products with enough information to enable them to read and understand the data products. THEMIS standard data products include experimental, reduced, and derived data files. The experimental and reduced products (VISED, IRED, VISR, and IRR) are spectral image QUBEs consisting of one layer per each visible or infrared band collected. The derived (VISAB and IRBT) are one band IMAGE files produced from the reduced products. The format and content specifications presented here apply to all data collection phases of the 2001 Mars Odyssey Project for which the data products are available. This SIS is intended to be used by the scientists who will analyze the data, including those associated with the 2001 Mars Odyssey Project and those in the general planetary science community.

## 1.2 Contents

This Standard Data Product SIS describes in detail how the visible and infrared data products are acquired by the THEMIS instrument, and how the data are processed, formatted, labeled, and uniquely identified. The document discusses standards used in generating the product and the software that may be used to access the product. The data product structure and organization is described in sufficient detail to enable a user to read the product. Finally, examples of product labels are provided.

## 1.3 Applicable Documents and Constraints

This Data Product SIS is responsive to the following 2001 Mars Odyssey documents:

1. Mars Exploration Program Data Management Plan, R. E. Arvidson and S. Slavney, Rev. 2, Nov. 2, 2000.
2. 2001 Mars Odyssey Orbiter Archive Generation, Validation and Transfer Plan, R. E. Arvidson, R. S. Saunders, and S. Slavney, JPL D-20679, November 3, 2000.

This SIS is also consistent with the following Planetary Data System documents:

3. Planetary Data System Data Preparation Workbook, February 1, 1995, Version 3.1, JPL D-7669, Part 1.
4. Planetary Data System Data Standards Reference, October 30, 2002, Version 3.5, JPL D-7669, Part 2.
5. Planetary Data System Data Dictionary, August 28, 2002, JPL D-7116, Rev E.  
(Note: The Data Dictionary is being updated to include several THEMIS specific changes.)

The user is referred to the following THEMIS documents for additional information:

6. The Thermal Emission Imaging System (THEMIS) for the Mars 2001 Odyssey Mission, P.R. Christensen, et. Al., *Space Science Review*, Vol 110, pp 85-130, 2004.

7. Calibration Report for the Thermal Emission Imaging System (THEMIS) for the 2001 Mars Odyssey Mission, P.R. Christensen.
8. Mars Odyssey THEMIS: Data Processing User's Guide, P.R. Christensen.
9. Mars Odyssey THEMIS: Geometric Processing User's Guide.

Finally, this SIS is meant to be consistent with the contract negotiated between the 2001 Mars Odyssey Project and the THEMIS Principal Investigator (PI) in which reduced data records and documentation are explicitly defined as deliverable products.

#### 1.4 Relationships with Other Interfaces

Changes in the standard data products (THM-EDR, THM-RDR, IRBTR, or VISABR) would require changes to this document. Changes to the data products will most likely also affect the processing software described in THEMIS Data Processing User's Guide [8].

## 2. DATA PRODUCT CHARACTERISTICS AND ENVIRONMENT

### 2.1 Instrument Overview

The THEMIS instrument is a combined infrared (IR) and visible (VIS) multi-spectral pushbroom imager. The imaging system is comprised of a three-mirror, off-axis, reflecting telescope in a rugged enclosure, a visible/infrared beamsplitter, a silicon focal plane for visible detection, and a microbolometer for infrared detection. The telescope has a 12-cm effective aperture, speed of f/1.6, and co-aligned VIS-IR detector arrays. A major feature of this instrument is the uncooled IR microbolometer array which can be operated at ambient temperature. A small thermal electric (TE) cooler is used to stabilize the detector temperature to  $\pm 0.001$  K. The calibration flag is the only moving part in the instrument, allowing for thermal calibration and protection of the detectors from unintentional direct Sun illumination when the instrument is not in use.

THEMIS IR images are acquired at selectable image lengths and in combinations of ten selectable bands. The image width is 320 pixels (32 km, based on the nominal 400 km mapping orbit) and the length is variable, in multiples of 256 line increments, with a minimum and maximum image lengths of 272 and 65,296 lines respectively (27.2 km and 6,530 km, based on the nominal mapping orbit). The IR focal plane is covered by ten  $\sim 1$   $\mu\text{m}$ -bandwidth strip filters, producing ten band images with bands 1 and 2 having the same wavelength range.

THEMIS VIS images are acquired in framelets of size 1024 pixels crosstrack by 192 lines downtrack, for a total image size of 3.734 Mbytes or less. The number of framelets is determined by the number of bands selected (five available) and the spatial resolution selected (three summing modes available). The size of an image is given by:

$$[(1024 * 192) * \text{\#framelets} * \text{\#bands}] \div \text{summing}^2 \leq 3.734 \text{ Mbytes}$$

For example, if spatial summing is not applied (summing=1), either a single-band, 19-framelet (65.6 km) image or a 5-band 3-framelet (10.3 km) image can be collected. Each VIS image collected is stored in the THEMIS internal buffer and must be transferred to the spacecraft computer before a subsequent image can be acquired. VIS images may be compressed with one of two available compression algorithms before storage on the spacecraft computer.



A VIS image can be acquired simultaneously with an IR image, but the spacecraft can only receive data from one of the two THEMIS imagers at a time. The IR imager transfers data as it is being collected, while the VIS images are stored within an internal THEMIS buffer for later transfer to the spacecraft computer. Before storage of IR images on the spacecraft, one or more data reduction techniques may be selected. The time-delay integration (TDI) algorithm may be applied to improve the signal-to-noise ratio of each pixel by co-adding 16 independent measurements of each point on the ground. Lossless data compression may be applied to the image by the hardware Rice algorithm chip.

The IR and VIS cameras share the instrument optics and housing, but have independent power and data interfaces to the spacecraft. In Spring 2006, a software patch was loaded into the spacecraft memory to apply spatial summing to IR images before downlink; use of this patch decreases the effective bandwidth of the IR camera, and allows for the collection of additional IR images. Final data stream formatting for both the IR and VIS data is performed by the spacecraft processor. Further information about onboard processing is available in the THEMIS *Space Science Review* paper [6].

## 2.2 Data Product Overview

The four THEMIS multi-spectral standard data products (referred to collectively as the THM-EDR and THM-RDR data products) include raw and radiometrically calibrated image QUBEs at either thermal infrared or visible wavelengths. As discussed in the Instrument Overview (Section 2.1), one THEMIS observation results in either a visible image, an infrared image, or both an infrared image and a visible image with overlapping spatial coverage. Additional infrared images, called “reset” and “shutter” images, are collected throughout each orbit for calibration purposes. All images are stored in binary format with an attached ASCII label and header data objects.

All THEMIS experimental and reduced standard data products are image QUBEs: VISED and IREDR contain raw data values; VISRDR and IRRDR contain radiometrically corrected radiance data. The label attached to each product contains identification and observation parameters associated with the image. A HISTORY data object, in ASCII format, follows the label within each product header. For raw infrared products (IREDR), the header includes a second data object containing binary telemetry information sampled regularly throughout the observation. In an image QUBE each layer contains the data from one instrument band; thus, a three band observation will result in a three layer QUBE. Available bands for each camera are listed in Table 1a&b. VIS layers are sorted into ascending wavelength order during QUBE generation. All standard data products are represented in raw raster order; geometric correction of the THM-RDR products is discussed in the THEMIS Geometric Processing User’s Guide [9].

Tables 1a&amp;b: THEMIS available bands

INFRARED BANDS			VISIBLE BANDS		
Band Numbers	Center ( $\mu\text{m}$ )	FWHM ( $\mu\text{m}$ )	Band Numbers	Center ( $\mu\text{m}$ )	FWHM ( $\mu\text{m}$ )
IR-1	6.78	1.01	V-1	0.425	0.049
IR-2	6.78	1.01	V-2	0.540	0.051
IR-3	7.93	1.09	V-3	0.654	0.053
IR-4	8.56	1.16	V-4	0.749	0.053
IR-5	9.35	1.20	V-5	0.860	0.045
IR-6	10.21	1.10			
IR-7	11.04	1.19			
IR-8	11.79	1.07			
IR-9	12.57	0.81			
IR-10	14.88	0.87			

There are two THEMIS derived standard data products: visible apparent brightness records (VISABR) and infrared brightness temperature records (IRBTR). These products are calculated from a single band of the corresponding RDR product: IRBTRs are usually derived from band IR-9; VISABRs are usually derived from band V-3. If the default band is not available, or significantly corrupt, another band may be used. Each brightness record is stored as an 8-bit IMAGE with an attached label containing identification and the geometric parameters calculated for the center of the observation (Appendices A.5 and A.6).

## 2.3 Standards Used in Generating Data Products

### 2.3.1 PDS Standards

The THM-EDR and THM-RDR data products comply with Planetary Data System standards for file formats and labels, as specified in the PDS Standards Reference [4].

### 2.3.2 QUBE Object

All multi-spectral THEMIS data products make use of the PDS spectral QUBE object, adapted from the ISIS cube object and defined in the PDS Standards Reference [4]. A QUBE is an array of sample values in two or more dimensions. The “core” of a THEMIS QUBE is three-dimensional, with two spatial dimensions (samples and lines) and one spectral dimension (bands), as shown conceptually in Figure 1a. This format allows THEMIS data to be simultaneously a set of images (at different wavelengths) of the same target area, and also a multi-point spectrum at each spatially registered pixel in the target area.

Additional information may be stored in “suffix” planes (back, side, or bottom) as shown in Figure 1b. Suffix planes may be found in early IR-RDR files (PRODUCT\_VERSION\_ID = 1.x); however, the use of suffix planes was discontinued in October 2022 with the release of product format version 2.0.

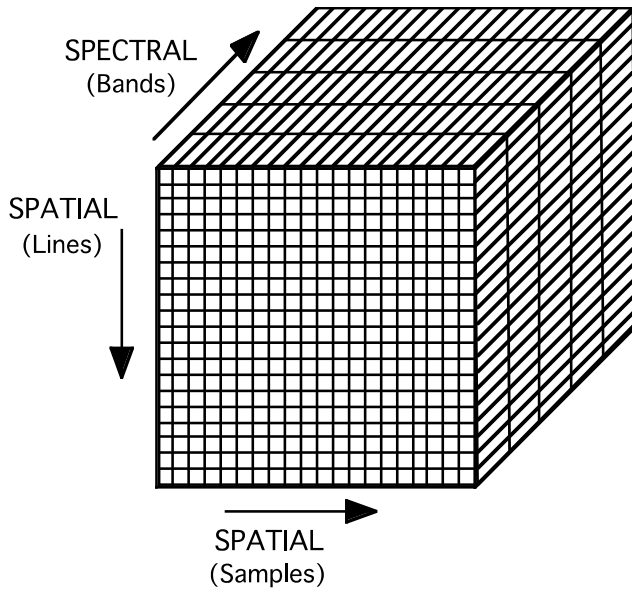


Figure 1a: THEMIS QUBE core structure

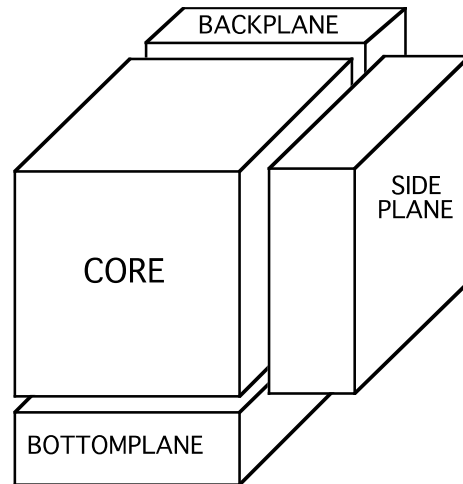


Figure 1b. Exploded view of PDS QUBE

The QUBE object has an attached label containing pertinent observation information, and header data objects (Figure 2). Required keywords, in the “keyword=value” text format of PDS labels, define QUBE structure, CORE parameters, and BAND\_BIN information. The header data objects contain information related to the image; for THEMIS QUBES these may include a HISTORY object and a telemetry TABLE object.

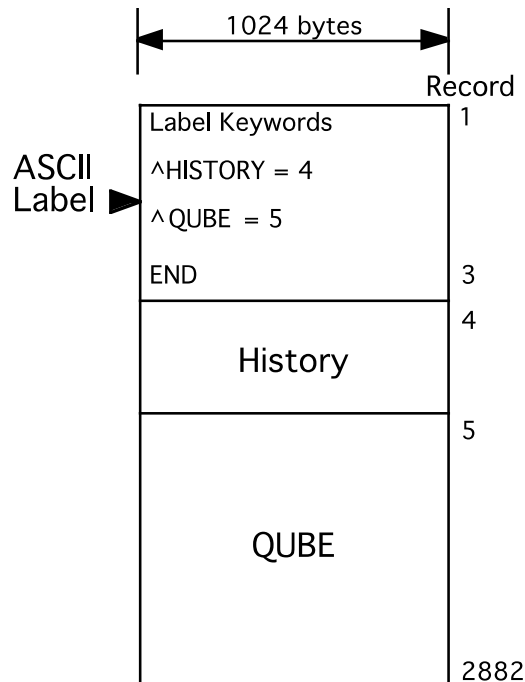


Figure 2: Example of a THEMIS VISED R QUBE: attached label, header data object, and image QUBE

### 2.3.3 IMAGE Object

THEMIS brightness products (IRBTR and VISABR) make use of the PDS IMAGE object defined in the PDS Standards Reference [4]. An IMAGE is a two-dimensional array of values organized as `line_samples` and `lines`. A THEMIS IMAGE is derived from a single band of a THM-RDR QUBE and has the same dimensions as that band. Each THEMIS IMAGE has an attached label, shown conceptually in Figure 3, containing a summary of observation information in the “keyword=value” format.

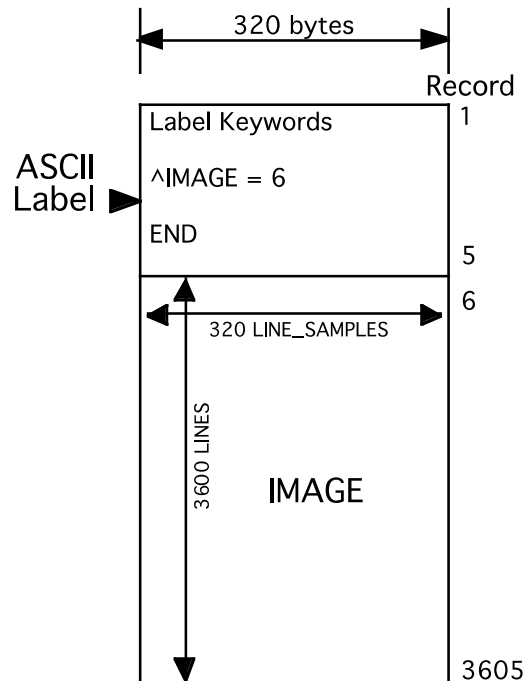


Figure 3: Example of a THEMIS IRBTR: attached label and IMAGE data

### 2.3.4 Time Standards

The time stamp (`SPACECRAFT_CLOCK_START_COUNT`) stored with each standard data product is the value of the spacecraft clock at the time of data acquisition of the leading edge of the first detector in the array (filter 1), even if filter 1 is not downlinked. For VIS QUBEs, this time is calculated from the `UNCORRECTED_SCLK_START_COUNT` and may differ by as much as 4 seconds, depending on which bands are acquired in the observation. The stop time stamp, `SPACECRAFT_CLOCK_STOP_COUNT`, is calculated from the sum of the `UNCORRECTED_SCLK_START_COUNT` and `IMAGE_DURATION`. For VIS QUBEs, the difference of the start and stop time stamps may not be equivalent to `IMAGE_DURATION`, depending on which bands are acquired in the observation.

The spacecraft clock value is equal to the number of seconds since 12:00 a.m. 1/01/1980 GMT. This number can vary from the number of seconds recorded on earth due to variations in the spacecraft’s oscillator or relativistic effects. The portion of the number that occurs after the decimal point is a count of “clock tics” which are  $1/256^{\text{th}}$  of a second long; the decimal portion will always be between 0 and 255. All data products also contain time values in UTC (Universal Time Coordinated) and ET (Ephemeris Time) formats, translated from the spacecraft event

times. UTC is the date (year, month, day) and time (hour, minute, second) in GMT. ET is the time in seconds since January 1, 2000 at 12:00:00 in Barycentric Dynamical Time (TDB).

### ***2.3.5 Coordinate Systems***

The THM-EDR and THM-RDR data products are not projected into any coordinate system. The image QUBEs are maintained in the raw raster order produced by the instrument, reorganized to group together the data from each band. The QUBE layers are not spatially registered. Layers within a single QUBE can be out of registration with each other by up to 10 lines and/or columns.

THEMIS brightness products (IRBTR and VISABR) are also not projected into any coordinate system, however they do contain some basic geometric parameters in the attached header. All geometric values are based on Mars IAU 2000 areocentric model with east positive longitude. Geometric parameters are generated with a THEMIS specific ISIS software package; for more information see the THEMIS Geometric Processing User's Guide [9].

### ***2.3.6 Orbit Numbering Conventions***

The orbit number (ORBIT\_NUMBER) stored with each THEMIS data product follows the convention established by the 2001 Mars Odyssey Project. During aerobraking, orbits are counted from the periapsis pass, with orbit 1 being the Mars Orbit Insertion pass. During mapping, orbits are counted from the descending equator crossing, incrementing from the last aerobraking orbit counted.

## **2.4 Data Product Contents**

### ***2.4.1 Data Processing Level***

All THEMIS standard data products comply with NASA processing levels standards. THM-EDR are Level-0 spectral image QUBEs of raw THEMIS science data at the full resolution returned from the spacecraft, time ordered, with duplicates and transmission errors removed. THM-RDR are Level-1A spectral image QUBEs, radiometrically calibrated versions of the THM-EDR products. IRBTR and VISABR are Level-1A IMAGES, calculated from the THM-RDR products with geometric parameters in the header.

### ***2.4.2 Data Product Generation***

The THEMIS data products will be generated by the staff at the ASU Mars Space Flight Facility. The data received on the ground are in the form of compressed, scaled, 8-bit "data numbers" (DN). Data processing will consist of decompression, radiometric calibration, and systematic noise removal. The instrument response functions necessary to perform calibration were acquired prior to launch using a thermal vacuum chamber at the SBRS facility (see THEMIS Calibration Report [7]). A detailed discussion of the processing techniques summarized below is available in the THEMIS Data Processing User's Guide [8].

For IR data, the DN values represent the delta signal between the scene and the internal reference calibration flag. After decompression, the data is converted to scene radiance by: (1) adjusting

for the gain and offset levels used during data collection; (2) correcting for drift or offset that occurs between observations of the calibration flag; and (3) converting signal to radiance using the instrument response function determined prior to launch.

For VIS data, the DN values represent relative radiance values which are converted to scene radiance by: (1) correcting for the CCD dark current with nighttime Mars images; and (2) converting signal to radiance using the instrument response function determined prior to launch. Both of the above VIS calibration steps are functions of the exposure setting of the camera, which is one of the defined image parameters available in the image label.

Brightness records are dependent on the values available in the source calibrated data record. The VISABR data values are an 8-bit version of the calibrated radiance, scaled to the minimum and maximum radiance values of each source image. The IRBTR data values are a scaled representation of the brightness temperature measured in degrees Kelvin. To remove the scaling, apply the following function to each data value (x)

$$y = m * x + b$$

where m is the SCALING\_FACTOR value and b is the OFFSET value, given in the IMAGE label.

### ***2.4.3 Data Product Archive***

Data will be accumulated, calibrated, and validated at the ASU Mars Space Flight Facility. The size of individual data products depends on several factors: image type (VIS vs. IR), length of an image, number of bands in the image, and data type (8-bit raw vs. 16-bit calibrated). Within these parameters, a raw VIS image (VISED) can vary in size from 0.38 to 3.7 Mbytes; a raw IR image (IRED) can vary in size from 0.07 to 199 Mbytes. Calibration of any of these images (VISRDR and IRRDR) increases the size by a factor of two. A brightness record is smaller than the source RDR, usually 0.5 Mbytes to 3.6 Mbytes, with the size primarily dependent on the image type and length of the original observation. Validation will be conducted using the latest, best-effort algorithms available.

The estimated total volume of data to be collected over the course of the mission is limited by the available downlink allocated to THEMIS. Many factors affect the actual downlink available on any given day, which can vary from 0 to more than 400 Mbytes per day. THEMIS mission planners will maximize data collection by balancing the day's available allocated downlink against the size-defining parameters of the daily planned observations (VIS/IR, image length, number of bands).

Data products will be archived and released following the agreement outlined in the 2001 Mars Odyssey Orbiter Archive Plan [2]. Due to the large volume of data products expected from the mission, physical copies will be made for PDS long-term archive purposes only. All other data distribution will be facilitated through an online THEMIS data archive service, maintained by the ASU Mars Space Flight Facility.

### ***2.4.4 Labeling and Identification***

Each THEMIS data product is stored in a single file following the PDS SPECTRAL\_CUBE format. Data products are uniquely identified by the PRODUCT\_ID which is based on the abbreviated description of the product type, the data collected time, and the data processing level

(see Section 3.1). File names follow the PDS convention of “PRODUCT\_ID”.QUB or “PRODUCT\_ID”.IMG.

Each product has an attached PDS label (see Section 3.3), which includes a PRODUCT\_VERSION\_ID keyword in the event that a revision to the product must be made after the initial public release. If a revision is required, the PRODUCT\_VERSION\_ID value will be incremented, an ERRATA\_ID will be established, and the change made will be documented. An ERRATA\_ID value takes the form of ODTaa\_rrrr\_v.v, where

- ODTaa is the abbreviated dataset description; [ ODTIB = IRBTR dataset; ODTIE = IREDR dataset; ODTIR = IRRDR dataset; ODTVb = VISABR dataset; ODTVE = VISEDR dataset; ODTVR = VISRDR dataset; ]
- rrrr is a zero padded, 4-digit RELEASE\_ID number identifying when the product was originally released; [ 0001 = data released in October 2002 ]
- v.v is the PRDUCT\_VERSION\_ID value [ 1.0 = first release of product ]

Every ERRATA\_ID will be documented in the ERRATA.TXT, the appropriate ODTaaREL.CAT, and the modified fields of the INDEX.TAB. For QUBE objects (THM-EDRs and THM-RDRs), a description of the applied errata will be added to the HISTORY object (see Appendix A.8).

### 3. DETAILED DATA PRODUCT SPECIFICATIONS

#### 3.1 Data Product Structure and Organization

Each THEMIS data product is an individual file with a unique label. Data products are organized in the time-sequential order that they were collected during the mission. Each file name consists of an alphanumeric identifier following the pattern “AooooonnnPPP.EXT”, where

- A is a 1-letter description of the type of image collected; [ V = visible image; I = infrared image; R = infrared reset image; S = infrared shutter image ]
- ooooo is a 5-digit mission orbit number when the image was collected; [ 01000 = mapping orbit number example ]
- nnn is a 3-digit image sequence number indicating the order that images were collected each orbit; [ 001 = first image collected in the xxxxx orbit ]
- PPP is a 3-letter description of the processing level of the image data; [ ABR = visible derived apparent brightness data; BTR = infrared derived brightness temperature data; EDR = raw data; RDR = radiometrically calibrated data ]
- .EXT is a 3-letter extension describing this product; [ IMG = PDS IMAGE format; QUB = PDS SPECTRAL\_QUBE format ]

More information, including mission orbit numbers, spacecraft clock times, processing dates, and version numbers, are accessible in the ASCII label described in Section 3.3 below.

#### 3.2 Data Format

The THM-EDR data products are uncompressed, binary, band-sequential QUBEs of 8-bit integers. The image width is fixed (320 pixels for IR, 1024 pixels for VIS), but the length varies proportional to the duration of the observation. The number of layers in a THM-EDR QUBE

corresponds to the number of bands selected for the observation: an IREDR may have up to 10 layers; a VISED R may have up to 5 layers.

The format of the IRRDR QUBEs is identical to the source IREDR QUBE, except that the data are stored as floating point values, scaled into 16-bit integers. To recover the floating point values, apply the following function to each data value per band ( $x_i$ )

$$y_i = m_i * x_i + b_i$$

where  $m_i$  is the BAND\_BIN\_MULTIPLIER value for band  $i$ , and  $b_i$  is the BAND\_BIN\_BASE value for band  $i$ . These scaling factors are given in the BAND\_BIN group within each IRRDR QUBE label.

The format of the VISRDR QUBEs is identical to the source VISED R QUBE, except that the data are stored as 16-bit MSB integers.

The THEMIS brightness products are uncompressed, binary, single band IMAGEs of 8-bit integers. The length and width of the IMAGE is identical to a single band of the source THM-RDR QUBE.

For IR QUBEs, missing data pixels are set to the CORE\_NULL value and the total count of missing lines is stored in the MISSING\_SCAN\_LINES keyword. For VISED R QUBEs, missing data pixels are either filled with zero values, if several complete lines are missing, or they are filled with a pattern of values, if a section of a line is missing. In VISRDR QUBEs, the missing data pixels are set to zero.

### 3.3 Labels

The PDS label describes the structure, content, and observation specifications of the data. It is attached as ASCII text at the beginning of each image file. Information in the label are stored in a “keyword=value” text format and structured in the Object Definition Language (ODL) of PDS. Example labels are shown in Appendices A.1-A.6; individual keyword items are defined in Appendices A.7-A.9.

#### 3.3.1 File Identification and Structure Label

The first lines of the label are the file identification keywords and associated values. Next are the file structure keywords, which define the number and size of records in the data file, followed by the pointer keywords, which define the start byte of the header data objects and the image data. Finally, “identification data elements” define parameters of the mission, spacecraft, instrument team, and data stream. See Appendix A.7 for a detailed description of these keywords.

#### 3.3.2 HISTORY Object Structure

A HISTORY object is available in each THEMIS QUBE. The HISTORY object structure keywords define the size and format of the data object stored later in the header. The HISTORY object itself is a structured series of text entries identifying all previous computer manipulations of the data in the file; the format is not intended to be compliant with PDS-ODL standards. HISTORY entries may include identification of source data, processes performed, processing parameters, and dates and times of processing. See Appendix A.8 for a detailed description of the entries and keywords used with THM-EDR and THM-RDR HISTORY objects.



### ***3.3.3 Telemetry Table Object Structure***

The telemetry (TLM) table is only available in the raw infrared data products (IREDR). The TLM table object structure keywords define the size and format of the table object stored later in the header. See Appendix A.7 for a detailed content description of the TLM table.

The TLM table itself follows the PDS TABLE structure using fixed length binary records sorted time-sequentially. The table structure is defined in an external, ASCII file identified in the pointer keyword as “t1m.fmt”. It contains details such as the table dimensions, a general description of the telemetry data source, and definitions of each table column. Column definitions include the following details: name, starting position (in bytes), size (in bytes), data type, description, and scaling factors if applicable. In some cases, the column being described is composed of multiple bit-fields; the individual meaning of each bit-field is described with the same details listed above.

The TLM table records can be accessed using the DAVINCI software package described in Section 4.1 below.

### ***3.3.4 QUBE Object Label***

The QUBE object keywords make up the bulk of a QUBE label and are organized by the following sub-structure descriptions:

QUBE structure	- parameters of the multidimensional array (image)
CORE description	- parameters of the array elements (pixels)
Observation parameters	- operational modes of the instrument for this image
Band-bins	- parameters of the layers (bands) in the array

See Appendix A.7 for a detailed description of the keywords used in the QUBE label.

### ***3.3.5 IMAGE Object Label***

The IMAGE object label describes the size and format of the image data. Since scaling has been applied to the IRBTR data, this label contains the required values to reproduce the true data. See Appendix A.7 for a detailed description of the keywords used in the IMAGE label.

## **4. APPLICABLE SOFTWARE**

### **4.1 Utility Programs**

The THEMIS team uses the software tools DAVINCI and ISIS to display and analyze the image QUBEs. DAVINCI is a data analysis package for working with images and image QUBEs. DAVINCI is distributed by ASU and is available at <http://davinici.asu.edu/software>. ISIS is an image processing package produced by USGS - Flagstaff and is available at <http://astrogeology.usgs.gov/Projects/ISIS>.

The software tool VANILLA is used to extract the telemetry (TLM) table object embedded in the image header. Vanilla was produced by the MGS-TES team at ASU to read and manipulate PDS tables and the variable-length records. Since DAVINCI can extract and read the TLM

table, most users will not need to acquire VANILLA, however, the software is available at <http://tes.asu.edu/software>.

#### **4.2 Applicable PDS Software Tools**

The THEMIS team uses no PDS software to view, manipulate or process the data. However, the images are stored and labeled using the PDS QUBE standard structure and any tool that understands that structure should be able to view them.

## A. APPENDICES

Appendices A.1-4 contains example labels from THEMIS IREDR, VISED, IRRDR, and VISRDR image QUBEs; appendices A.5-6 contain example labels from THEMIS IRBTR and VISABR IMAGES. Definitions of individual items contained in the label are given in Appendix A.7 and are listed in the order of appearance within a QUBE label. “Valid values” for each item are shown in [ ] at end of each description, as appropriate. Appendix A.8 contains definitions for the basic HISTORY items used and example HISTORY objects. Appendix A.9, Telemetry Table Structure contains a copy of the “t1m.fmt” file which defines and describes that object.

### A.1 Example Label: IREDR

An example IREDR label is shown below:

```
PDS_VERSION_ID = PDS3

/* File Identification and Structure */
RECORD_TYPE = "FIXED_LENGTH"
RECORD_BYTES = 320
FILE_RECORDS = 18092
LABEL_RECORDS = 9

/* Pointers to Data Objects */
^HISTORY = 10
^TABLE = 12
^SPECTRAL_QUBE = 13

/* Identification Data Elements */
MISSION_NAME = "2001 MARS ODYSSEY"
INSTRUMENT_HOST_NAME = "2001 MARS ODYSSEY"
INSTRUMENT_NAME = "THERMAL EMISSION IMAGING SYSTEM"
INSTRUMENT_ID = "THEMIS"
DETECTOR_ID = "IR"
MISSION_PHASE_NAME = "MAPPING"
SPACECRAFT_ORIENTATION_DESC = (PITCH,ROLL,YAW)
SPACECRAFT_ORIENTATION = (0,0,0)
SPACECRAFT_POINTING_MODE = "NADIR"
^SPACECRAFT_POINTING_MODE_DESC = "ODY_ORIENT_POINT.TXT"
TARGET_NAME = "MARS"
PRODUCT_ID = "I00013007EDR"
PRODUCER_ID = "ODY_THM_TEAM"
DATA_SET_ID = "ODY-M-THM-2-IREDR-V1.0"
PRODUCT_CREATION_TIME = 2002-03-08T21:54:02
PRODUCT_VERSION_ID = "1.0"
RELEASE_ID = "0001"
START_TIME = 2001-11-02T14:38:30.010
```

```
STOP_TIME = 2001-11-02T14:39:30.271
SPACECRAFT_CLOCK_START_COUNT = "689179146.000"
SPACECRAFT_CLOCK_STOP_COUNT = "689179206.067"
START_TIME_ET = 57983974.192
STOP_TIME_ET = 57984034.453
SCLKERNEL = "ORB1_SCLKSCET.00277.tsc"
ORBIT_NUMBER = 00013

/* History Object Structure */
OBJECT = HISTORY
  BYTES = 640
  HISTORY_TYPE = CUSTOM
  INTERCHANGE_FORMAT = ASCII
END_OBJECT = HISTORY

/* Telemetry Table Structure */
OBJECT = TABLE
  NAME = TLM
  ROWS = 2
  ^STRUCTURE = "tlm.fmt"
END_OBJECT = TABLE

OBJECT = SPECTRAL_CUBE

/* CUBE Structure */
AXES = 3
AXIS_NAME = (SAMPLE, LINE, BAND)

/* Core Description */
CORE_ITEMS = (320, 1808, 10)
CORE_NAME = "RAW_DATA_NUMBER"
CORE_ITEM_BYTES = 1
CORE_ITEM_TYPE = MSB_UNSIGNED_INTEGER
CORE_BASE = 0.0
CORE_MULTIPLIER = 1.0
CORE_UNIT = "DIMENSIONLESS"
CORE_NULL = 0

/* Observation Parameters */
FLIGHT_SOFTWARE_VERSION_ID = "1.00"
COMMAND_SEQUENCE_NUMBER = 13
IMAGE_ID = 7
DESCRIPTION = "Example IR image"
INST_CMPRS_RATIO = 2.70
UNCORRECTED_SCLK_START_COUNT = "689179146.000"
```

```

IMAGE_DURATION = 60.067
GAIN_NUMBER = 8
OFFSET_NUMBER = 0
TIME_DELAY_INTEGRATION_FLAG = "ENABLED"
RICE_FLAG = "ENABLED"
SPATIAL_SUMMING = 1
PARTIAL_SUM_LINES = "N/A"
MISSING_SCAN_LINES = 0
MD5_CHECKSUM = "fe027fe2ca98562a1d61e0d6be3284d0"

```

```
/*Band Bins */
```

```

GROUP = BAND_BIN
  BAND_BIN_FILTER_NUMBER = (1, 2, 3, 4, 5, 6, 7, 8, 9, 10)
  BAND_BIN_BAND_NUMBER = (1, 2, 3, 4, 5, 6, 7, 8, 9, 10)
  BAND_BIN_CENTER = (6.78, 6.78, 7.93, 8.56, 9.35, 10.21, 11.04, 11.79, 12.57,
                    14.88)
  BAND_BIN_WIDTH = ( 1.01, 1.01, 1.09, 1.16, 1.20, 1.10, 1.19, 1.07, 0.81, 0.87 )
  BAND_BIN_UNIT = "MICROMETER"
END_GROUP = BAND_BIN

```

```
END_OBJECT = SPECTRAL_CUBE
```

```
END
```

## A.2 Example Label: VISED

An example VISED label is shown below:

```
PDS_VERSION_ID = PDS3
```

```
/* File Identification and Structure */
```

```

RECORD_TYPE = "FIXED_LENGTH"
RECORD_BYTES = 1024
FILE_RECORDS = 2882
LABEL_RECORDS = 2

```

```
/* Pointers to Data Objects */
```

```

^HISTORY = 3
^SPECTRAL_CUBE = 4

```

```
/* Identification Data Elements */
```

```

MISSION_NAME = "2001 MARS ODYSSEY"
INSTRUMENT_HOST_NAME = "2001 MARS ODYSSEY"
INSTRUMENT_NAME = "THERMAL EMISSION IMAGING SYSTEM"
INSTRUMENT_ID = "THEMIS"
DETECTOR_ID = "VIS"

```

```
MISSION_PHASE_NAME = "MAPPING"  
SPACECRAFT_ORIENTATION_DESC = (PITCH,ROLL,YAW)  
SPACECRAFT_ORIENTATION = (0,0,0)  
SPACECRAFT_POINTING_MODE = "NADIR"  
^SPACECRAFT_POINTING_MODE_DESC = "ODY_ORIENT_POINT.TXT"  
TARGET_NAME = "MARS"  
PRODUCT_ID = "V00013003EDR"  
PRODUCER_ID = "ODY_THM_TEAM"  
DATA_SET_ID = "ODY-M-THM-2-VISEDR-V1.0"  
PRODUCT_CREATION_TIME = 2002-03-08T21:45:02  
PRODUCT_VERSION_ID = "1.0"  
RELEASE_ID = "0001"  
START_TIME = 2001-11-02T14:38:49.010  
STOP_TIME = 2001-11-02T14:38:56.010  
SPACECRAFT_CLOCK_START_COUNT = "689179165.000"  
SPACECRAFT_CLOCK_STOP_COUNT = "689179172.000"  
START_TIME_ET = 57983993.192  
STOP_TIME_ET = 57984000.192  
SCLKERNEL = "ORB1_SCLKSCET.00277.tsc"  
ORBIT_NUMBER = 00013
```

```
/* History Object Structure */
```

```
OBJECT = HISTORY  
  BYTES = 1024  
  HISTORY_TYPE = CUSTOM  
  INTERCHANGE_FORMAT = ASCII  
END_OBJECT = HISTORY
```

```
OBJECT = SPECTRAL_CUBE
```

```
/* QUBE Structure */
```

```
AXES = 3  
AXIS_NAME = (SAMPLE, LINE, BAND)
```

```
/* Core Description */
```

```
CORE_ITEMS = (1024, 576, 5)  
CORE_NAME = "RAW_DATA_NUMBER"  
CORE_ITEM_BYTES = 1  
CORE_ITEM_TYPE = MSB_UNSIGNED_INTEGER  
CORE_BASE = 0.0  
CORE_MULTIPLIER = 1.0  
CORE_UNIT = "DIMENSIONLESS"  
CORE_NULL = 0
```

```
/* Observation Parameters */
```

```
FLIGHT_SOFTWARE_VERSION_ID = "1.00"
```

```

COMMAND_SEQUENCE_NUMBER = 13
IMAGE_ID = 3
DESCRIPTION = "Example VIS image"
INST_CMPRS_RATIO = 1.93
UNCORRECTED_START_SCLK_COUNT = "689179165.000"
IMAGE_DURATION = 7.000
INST_CMPRS_NAME = "PREDICTIVE"
FOCAL_PLANE_TEMPERATURE = -0.42
EXPOSURE_DURATION = 3.000
INTERFRAME_DELAY = 1.000
SPATIAL_SUMMING = 1
MD5_CHECKSUM = "851ab2a81c55db940fc59200d9ba6f6f"

/*Band Bins */
GROUP = BAND_BIN
  BAND_BIN_FILTER_NUMBER = (2, 5, 3, 4, 1)
  BAND_BIN_BAND_NUMBER = (1, 2, 3, 4, 5)
  BAND_BIN_CENTER = (0.425, 0.540, 0.654, 0.749, 0.860)
  BAND_BIN_WIDTH = ( 0.049, 0.051, 0.053, 0.053, 0.045 )
  BAND_BIN_UNIT = "MICROMETER"
END_GROUP = BAND_BIN

END_OBJECT = SPECTRAL_QUBE

END

```

### A.3 Example Label: IRRDR

An example IRRDR label is shown below:

```

PDS_VERSION_ID = PDS3

/* File Identification and Structure */
RECORD_TYPE = "FIXED_LENGTH"
RECORD_BYTES = 644
FILE_RECORDS = 18114
LABEL_RECORDS = 7

/* Pointers to Data Objects */
^HISTORY = 8
^SPECTRAL_QUBE = 15

/* Identification Data Elements */
MISSION_NAME = "2001 MARS ODYSSEY"
INSTRUMENT_HOST_NAME = "2001 MARS ODYSSEY"
INSTRUMENT_NAME = "THERMAL EMISSION IMAGING SYSTEM"

```

```

INSTRUMENT_ID = "THEMIS"
DETECTOR_ID = "IR"
MISSION_PHASE_NAME = "MAPPING"
SPACECRAFT_ORIENTATION_DESC = (PITCH,ROLL,YAW)
SPACECRAFT_ORIENTATION = (0,0,0)
SPACECRAFT_POINTING_MODE = "NADIR"
^SPACECRAFT_POINTING_MODE_DESC = "ODY_ORIENT_POINT.TXT"
TARGET_NAME = "MARS"
PRODUCT_ID = "I00013007RDR"
PRODUCER_ID = "ODY_THM_TEAM"
DATA_SET_ID = "ODY-M-THM-3-IRRDR-V1.0"
PRODUCT_CREATION_TIME = 2002-03-08T22:00:02
PRODUCT_VERSION_ID = "1.0"
RELEASE_ID = "0002"
START_TIME = 2001-11-02T14:38:30.010
STOP_TIME = 2001-11-02T14:39:30.271
SPACECRAFT_CLOCK_START_COUNT = "689179146.000"
SPACECRAFT_CLOCK_STOP_COUNT = "689179206.067"
START_TIME_ET = 57983974.192
STOP_TIME_ET = 57984034.453
SCLKERNEL = "ORB1_SCLKSCET.00277.tsc"
ORBIT_NUMBER = 00013

```

```
/* History Object Structure */
```

```

OBJECT = HISTORY
  BYTES = 1932
  HISTORY_TYPE = CUSTOM
  INTERCHANGE_FORMAT = ASCII
END_OBJECT = HISTORY

```

```
OBJECT = SPECTRAL_CUBE
```

```
/* QUBE Structure */
```

```

AXES = 3
AXIS_NAME = (SAMPLE, LINE, BAND)

```

```
/* Core Description */
```

```

CORE_ITEMS = (320, 1808, 10)
CORE_NAME = "CALIBRATED_SPECTRAL_RADIANCE"
CORE_ITEM_BYTES = 2
CORE_ITEM_TYPE = SUN_INTEGER
CORE_BASE = 0.000000
CORE_MULTIPLIER = 1.000000
CORE_UNIT = "WATT*CM**-2*SR**-1*UM**-1"
CORE_NULL = -32768
CORE_VALID_MINIMUM = -32752

```



```

CORE_LOW_REPR_SATURATION = -32757
CORE_LOW_INSTR_SATURATION = -32766
CORE_HIGH_REPR_SATURATION = -32765
CORE_HIGH_INSTR_SATURATION = -32764

```

```

/* Suffix Description for PRODUCT_VERSION_ID = 2.x*/
SUFFIX_ITEMS = (0, 0, 0)
SUFFIX_BYTES = 0

```

```

/* Suffix Description for PRODUCT_VERSION_ID = 1.x*/
SUFFIX_ITEMS = (1, 1, 0)
SUFFIX_BYTES = 4
SAMPLE_SUFFIX_NAME = HORIZONTAL_DESTRIPE
SAMPLE_SUFFIX_ITEM_BYTES = 2
SAMPLE_SUFFIX_ITEM_TYPE = MSB_INTEGER
SAMPLE_SUFFIX_BASE = -0.001143
SAMPLE_SUFFIX_MULTIPLIER = 0.002281
SAMPLE_SUFFIX_VALID_MINIMUM = 16#FF7FFFA#
SAMPLE_SUFFIX_NULL = 16#FF7FFFB#
SAMPLE_SUFFIX_LOW_REPR_SATURATION = 16#FF7FFFC#
SAMPLE_SUFFIX_LOW_INSTR_SATURATION = 16#FF7FFFD#
SAMPLE_SUFFIX_HIGH_REPR_SATURATION = 16#FF7FFFF#
SAMPLE_SUFFIX_HIGH_INSTR_SATURATION = 16#FF7FFFFE#
LINE_SUFFIX_NAME = VERTICAL_DESTRIPE
LINE_SUFFIX_ITEM_BYTES = 2
LINE_SUFFIX_ITEM_TYPE = MSB_INTEGER
LINE_SUFFIX_BASE = -0.000626
LINE_SUFFIX_MULTIPLIER = 0.00747
LINE_SUFFIX_VALID_MINIMUM = 16#FF7FFFA#
LINE_SUFFIX_NULL = 16#FF7FFFB#
LINE_SUFFIX_LOW_REPR_SATURATION = 16#FF7FFFC#
LINE_SUFFIX_LOW_INSTR_SATURATION = 16#FF7FFFD#
LINE_SUFFIX_HIGH_REPR_SATURATION = 16#FF7FFFF#
LINE_SUFFIX_HIGH_INSTR_SATURATION = 16#FF7FFFFE#

```

```

/* Observation Parameters */
FLIGHT_SOFTWARE_VERSION_ID = "1.00"
COMMAND_SEQUENCE_NUMBER = 13
IMAGE_ID = 7
DESCRIPTION = "Example IR image"
INST_CMPRS_RATIO = 2.70
UNCORRECTED_START_SCLK_COUNT = "689179146.000"
IMAGE_DURATION = 60.067
GAIN_NUMBER = 8
OFFSET_NUMBER = 0
TIME_DELAY_INTEGRATION_FLAG = "ENABLED"

```

```

RICE_FLAG = "ENABLED"
SPATIAL_SUMMING = 1
PARTIAL_SUM_LINES = "N/A"
MISSING_SCAN_LINES = 0
MD5_CHECKSUM = "cbfa3fbc6b5304ffa2976fe795e4931f"

/*Band Bins */
GROUP = BAND_BIN
  BAND_BIN_FILTER_NUMBER = (1, 2, 3, 4, 5, 6, 7, 8, 9, 10)
  BAND_BIN_BAND_NUMBER = (1, 2, 3, 4, 5, 6, 7, 8, 9, 10)
  BAND_BIN_CENTER = (6.78, 6.78, 7.93, 8.56, 9.35, 10.21, 11.04, 11.79, 12.57,
                    14.88)
  BAND_BIN_WIDTH = ( 1.01, 1.01, 1.09, 1.16, 1.20, 1.10, 1.19, 1.07, 0.81, 0.87 )
  BAND_BIN_UNIT = "MICROMETER"
  BAND_BIN_BASE = ( 2.656679681e-05, 2.74269205e-05, 3.729695163e-05,
                   4.733170135e-05, 6.271082384e-05, 7.835045108e-05,
                   8.724376676e-05, 9.393366781e-05, 0.000105464962e-05,
                   7.620971883e-05)
  BAND_BIND_MULITPLIER = ( 8.363602033e-10, 8.980139965e-10,
                          8.593996625e-10, 90.89641817e-10,
                          1.057962828e-09, 1.188111942e-09,
                          1.290969553e-09, 1.365228153e-09,
                          1.36689926e-09, 1.159281893e-09)

END_GROUP = BAND_BIN

END_OBJECT = SPECTRAL_QUBE

END

```

#### A.4 Example Label: VISRDR

An example VISRDR label is shown below:

```

PDS_VERSION_ID = PDS3

/* File Identification and Structure */
RECORD_TYPE = "FIXED_LENGTH"
RECORD_BYTES = 2048
FILE_RECORDS = 2882
LABEL_RECORDS = 2

/* Pointers to Data Objects */
^HISTORY = 3
^SPECTRAL_QUBE = 5

/* Identification Data Elements */

```

```

MISSION_NAME = "2001 MARS ODYSSEY"
INSTRUMENT_HOST_NAME = "2001 MARS ODYSSEY"
INSTRUMENT_NAME = "THERMAL EMISSION IMAGING SYSTEM"
INSTRUMENT_ID = "THEMIS"
DETECTOR_ID = "VIS"
MISSION_PHASE_NAME = "MAPPING"
SPACECRAFT_ORIENTATION_DESC = (PITCH,ROLL,YAW)
SPACECRAFT_ORIENTATION = (0,0,0)
SPACECRAFT_POINTING_MODE = "NADIR"
^SPACECRAFT_POINTING_MODE_DESC = "ODY_ORIENT_POINT.TXT"
TARGET_NAME = "MARS"
PRODUCT_ID = "V00013102RDR"
PRODUCER_ID = "ODY_THM_TEAM"
DATA_SET_ID = "ODY-M-THM-3-VISRDR-V1.0"
PRODUCT_CREATION_TIME = 2002-03-08T22:01:02
PRODUCT_VERSION_ID = "1.0"
SOURCE_PRODUCT_VERSION_ID = "1.0"
RELEASE_ID = "0002"
START_TIME = 2001-11-02T14:38:49.010
STOP_TIME = 2001-11-02T14:38:56.010
SPACECRAFT_CLOCK_START_COUNT = "689179165.000"
SPACECRAFT_CLOCK_STOP_COUNT = "689179172.000"
START_TIME_ET = 57983993.192
STOP_TIME_ET = 57984000.192
SCLKERNEL = "ORB1_SCLKSCET.00277.tsc"
ORBIT_NUMBER = 00013

```

```

/* History Object Structure */

```

```

OBJECT = HISTORY
  BYTES = 4096
  HISTORY_TYPE = CUSTOM
  INTERCHANGE_FORMAT = ASCII
END_OBJECT = HISTORY

```

```

OBJECT = SPECTRAL_CUBE

```

```

/* CUBE Structure */

```

```

AXES = 3
AXIS_NAME = (SAMPLE, LINE, BAND)

```

```

/* Core Description */

```

```

CORE_ITEMS = (1024, 576, 5)
CORE_NAME = "CALIBRATED_SPECTRAL_RADIANCE"
CORE_ITEM_BYTES = 2
CORE_ITEM_TYPE = MSB_INTEGER
CORE_BASE = 0.003023635

```

```

CORE_MULTIPLIER = 7.868385E-08
CORE_UNIT = "WATT*CM**-2*SR**-1UM**-1"
CORE_NULL = -32768
CORE_VALID_MINIMUM = -32752
CORE_LOW_INSTR_SATURATION = -32766
CORE_LOW_REPR_SATURATION = -32767
CORE_HIGH_INSTR_SATURATION = -32765
CORE_HIGH_REPR_SATURATION = -32764

/* Observation Parameters */
FLIGHT_SOFTWARE_VERSION_ID = "1.0"
COMMAND_SEQUENCE_NUMBER = 13
IMAGE_ID = 102
DESCRIPTION = "Example VIS image"
INST_CMPRS_RATIO = 1.93
UNCORRECTED_START_SCLK_COUNT = "689179165.000"
IMAGE_DURATION = 7.000
INST_CMPRS_NAME = "PREDICTIVE"
FOCAL_PLANE_TEMPERATURE = 6.17
EXPOSURE_DURATION = 6.000
INTERFRAME_DELAY = 1.000
SPATIAL_SUMMING = 1
MD5_CHECKSUM = "d724f3012fc0ed96bea02f039dc70fd4"

/*Band Bins */
GROUP = BAND_BIN
  BAND_BIN_FILTER_NUMBER = (2, 5, 3, 4, 1)
  BAND_BIN_BAND_NUMBER = (1, 2, 3, 4, 5)
  BAND_BIN_CENTER = (0.425, 0.540, 0.654, 0.749, 0.860)
  BAND_BIN_WIDTH = ( 0.049, 0.051, 0.053, 0.053, 0.045 )
  BAND_BIN_UNIT = "MICROMETER"
END_GROUP = BAND_BIN

END_OBJECT = SPECTRAL_CUBE

END

```

### A.5 Example Label: IRBTR

An example IRBTR label is shown below:

```

PDS_VERSION_ID = PDS3
FILE_NAME = "I00013007BTR.IMG"
RECORD_TYPE = FIXED_LENGTH
RECORD_BYTES = 320
FILE_RECORDS = 3605

```

LABEL\_RECORDS = 5  
^IMAGE = 6

MISSION\_NAME = "2001 MARS ODYSSEY"  
INSTRUMENT\_HOST\_NAME = "2001 MARS ODYSSEY"  
INSTRUMENT\_NAME = "THERMAL EMISSION IMAGING SYSTEM"  
INSTRUMENT\_ID = "THEMIS"  
DETECTOR\_ID = "IR"  
MISSION\_PHASE\_NAME = "MAPPING"  
SPACECRAFT\_ORIENTATION\_DESC = (PITCH,ROLL,YAW)  
SPACECRAFT\_ORIENTATION = (0,0,0)  
SPACECRAFT\_POINTING\_MODE = "NADIR"  
^SPACECRAFT\_POINTING\_MODE\_DESC = "ODY\_ORIENT\_POINT.TXT"  
TARGET\_NAME = "MARS"  
PRODUCT\_ID = "I00013007BTR"  
PRODUCER\_ID = "ODY\_THM\_TEAM"  
DATA\_SET\_ID = "ODY-M-THM-3-IRBTR-V1.0"  
PRODUCT\_CREATION\_TIME = 2002-12-13T22:01:02  
PRODUCT\_VERSION\_ID = "1.0"  
RELEASE\_ID = "0001"  
SOURCE\_PRODUCT\_VERSION\_ID = "1.0"  
START\_TIME = 2001-11-02T14:38:30.010  
STOP\_TIME = 2001-11-02T14:39:30.271  
SPACECRAFT\_CLOCK\_START\_COUNT = "689179146.000"  
SPACECRAFT\_CLOCK\_STOP\_COUNT = "689179206.067"  
START\_TIME\_ET = 57983974.192  
STOP\_TIME\_ET = 57984034.453  
UNCORRECTED\_START\_SCLK\_COUNT = "689179146.000"  
IMAGE\_DURATION = 60.067  
SCLKERNEL = "ORB1\_SCLKSCET.00277.tsc"  
ORBIT\_NUMBER = 00013

GEOMETRY\_SOURCE\_DESC = "Reconstructed"  
CENTER\_LATITUDE = 37.1501  
CENTER\_LONGITUDE = 228.533  
POSITIVE\_LONGITUDE\_DIRECTION = EAST  
SAMPLE\_RESOLUTION = 0.106657 <KM>  
LINE\_RESOLUTION = 0.099384 <KM>  
PIXEL\_ASPECT\_RATIO = 0.931809  
PHASE\_ANGLE = 69.1583  
INCIDENCE\_ANGLE = 67.2117  
EMISSION\_ANGLE = 2.85361  
NORTH\_AZIMUTH = 262.948  
SLANT\_DISTANCE = 428.399 <KM>  
LOCAL\_TIME = 15.2233  
SOLAR\_LONGITUDE = 329.633

```

SUB_SOLAR_AZIMUTH = 90.2889

MINIMUM_BRIGHTNESS_TEMPERATURE = 191.483
MAXIMUM_BRIGHTNESS_TEMPERATURE = 246.457

BAND_NUMBER = 9
BAND_CENTER = 12.57 <MICROMETERS>
SPATIAL_SUMMING = 1

OBJECT = IMAGE
  LINES = 3600
  LINE_SAMPLES = 320
  SAMPLE_TYPE = UNSIGNED_INTEGER
  SAMPLE_BITS = 8
  ODY:SAMPLE_NAME = "BRIGHTNESS_TEMPERATURE"
  ODY:SAMPLE_UNIT = "KELVIN"
  OFFSET = 191.482925
  SCALING_FACTOR = 0.215584
  MD5_CHECKSUM = "c2542ae519de9885cca8f9962c669d32"
END_OBJECT = IMAGE

END

```

### A.6 Example Label: VISABR

An example VISABR label is shown below:

```

PDS_VERSION_ID = PDS3
FILE_NAME = "V00013002ABR.IMG"
RECORD_TYPE = FIXED_LENGTH
RECORD_BYTES = 2048
FILE_RECORDS = 289
LABEL_RECORDS = 1
^IMAGE = 2

MISSION_NAME = "2001 MARS ODYSSEY"
INSTRUMENT_HOST_NAME = "2001 MARS ODYSSEY"
INSTRUMENT_NAME = "THERMAL EMISSION IMAGING SYSTEM"
INSTRUMENT_ID = "THEMIS"
DETECTOR_ID = "VIS"
MISSION_PHASE_NAME = "MAPPING"
SPACECRAFT_ORIENTATION_DESC = (PITCH,ROLL,YAW)
SPACECRAFT_ORIENTATION = (0,0,0)
SPACECRAFT_POINTING_MODE = "NADIR"
^SPACECRAFT_POINTING_MODE_DESC = "ODY_ORIENT_POINT.TXT"
TARGET_NAME = "MARS"
PRODUCT_ID = "V00013002ABR"

```

PRODUCER\_ID = "ODY\_THM\_TEAM"  
DATA\_SET\_ID = "ODY-M-THM-3-VISABR-V1.0"  
PRODUCT\_CREATION\_TIME = 2002-12-15T22:30:02  
PRODUCT\_VERSION\_ID = "1.0"  
RELEASE\_ID = "0001"  
SOURCE\_PRODUCT\_VERSION\_ID = "1.0"  
START\_TIME = 2001-11-02T14:38:49.010  
STOP\_TIME = 2001-11-02T14:38:56.000  
SPACECRAFT\_CLOCK\_START\_COUNT = "689179165.000"  
SPACECRAFT\_CLOCK\_STOP\_COUNT = "689179172.000"  
START\_TIME\_ET = 57983993.192  
STOP\_TIME\_ET = 57984000.192  
UNCORRECTED\_START\_SCLK\_COUNT = "689179165.000"  
IMAGE\_DURATION = 7.000  
SCLKERNEL = "ORB1\_SCLKSCET.00277.tsc"  
ORBIT\_NUMBER = 00013

GEOMETRY\_SOURCE\_DESC = "Reconstructed"  
CENTER\_LATITUDE = 37.5317  
CENTER\_LONGITUDE = 228.597  
POSITIVE\_LONGITUDE\_DIRECTION = EAST  
SAMPLE\_RESOLUTION = 0.019275 <KM>  
LINE\_RESOLUTION = 0.01928 <KM>  
PIXEL\_ASPECT\_RATIO = 1.00027  
PHASE\_ANGLE = 68.6399  
INCIDENCE\_ANGLE = 67.4721  
EMISSION\_ANGLE = 1.76492  
NORTH\_AZIMUTH = 266.904  
SLANT\_DISTANCE = 428.342 <KM>  
LOCAL\_TIME = 15.2261  
SOLAR\_LONGITUDE = 329.633  
SUB\_SOLAR\_AZIMUTH = 139.148

BAND\_NUMBER = 3  
BAND\_CENTER = 0.654 <MICROMETERS>  
EXPOSURE\_DURATION = 6.0 <MSEC>  
INTERFRAME\_DELAY = 1.0 <SEC>  
SPATIAL\_SUMMING = 1

OBJECT = IMAGE  
LINES = 576  
LINE\_SAMPLES = 1024  
SAMPLE\_TYPE = UNSIGNED\_INTEGER  
SAMPLE\_BITS = 8  
MD5\_CHECKSUM = "ee242dc31300d9f0b8c467ddb59f6dd0"  
END\_OBJECT = IMAGE

END

## A.7 Label Keyword Descriptions

### ***FILE AND DATA IDENTIFICATION ELEMENTS***

#### **PDS\_VERSION\_ID**

PDS version number for the label format. [PDS3]

#### **RECORD\_TYPE**

Style of records in this file. [“FIXED\_LENGTH”]

#### **RECORD\_BYTES**

Number of bytes per record. [320 (for IREDR), 1024 (for VISED), 644 (for IRRDR), or 2048 (for VISRDR)]

#### **FILE\_RECORDS**

Number of records in this file, including labels and data.

#### **LABEL\_RECORDS**

Number of records used for label data; value does not include records in the Telemetry table or HISTORY object.

#### **MISSION\_NAME**

Name of the mission including the THEMIS instrument. [“2001 MARS ODYSSEY”]

#### **INSTRUMENT\_HOST\_NAME**

Name of the host spacecraft for the THEMIS instrument. [“2001 MARS ODYSSEY”]

#### **INSTRUMENT\_NAME**

Proper name of the instrument. [“THERMAL EMISSION IMAGING SYSTEM”]

#### **INSTRUMENT\_ID**

Abbreviated name of instrument used to collect this image. [“THEMIS”]

#### **DETECTOR\_ID**

Abbreviated name of camera used to collect this image. [“IR” or “VIS”]

#### **MISSION\_PHASE\_NAME**

Mission phase during which this image was collected. [“MAPPING”]

#### **SPACECRAFT\_ORIENTATION\_DESC**

Description of rotation axis corresponding to values of SPACECRAFT\_ORIENTATION keyword. [(PITCH,ROLL,YAW)]

#### **SPACECRAFT\_ORIENTATION**

Odyssey orientation during which this image was collected; described as a angle (in degrees) of rotation away from nadir around the three axes spacecraft frame of reference; see given in SPACECRAFT\_POINTING\_MODE\_DESC value for more information. [(#,#,#)]



**SPACECRAFT\_POINTING\_MODE**

Description of the Odyssey pointing mode during which this image was collected; see text given in SPACECRAFT\_POINTING\_MODE\_DESC value for definitions of valid modes.

**^SPACECRAFT\_POINTING\_MODE\_DESC**

Pointer to text file describing valid Odyssey orientation values and pointing modes; text file is in the DOCUMENT directory. [“ODY\_ORIENT\_POINT.TXT”]

**TARGET\_NAME**

The name of the target observed in the image. [“MARS”]

**PRODUCT\_ID**

Unique identifier for each image commanded. [“AooooonnnEDR”, “AooooonnnRDR”, “IooooonnnBTR”, or “VooooonnnABR”]

**PRODUCER\_ID**

Identity of the producer of this dataset. [“ODY\_THM\_TEAM”]

**DATA\_SET\_ID**

Unique alphanumeric identifier of this dataset. [“ODY-M-THM-2-IREDR-V1.0”, “ODY-M-THM-2-VESEDR-V1.0”, “ODY-M-THM-3-IRRDR-V1.0”, “ODY-M-THM-3-VISRDR-V1.0”, “ODY-M-THM-3-IRBTR-V1.0”, or “ODY-M-THM-3-VISABR-V1.0”]

**PRODUCT\_CREATION\_TIME**

Time of creation of this QUBE on the ground (in UTC). [yyyy-mm-ddThh:mm:ss]

**PRODUCT\_VERSION\_ID**

Version identification of this QUBE.

**RELEASE\_ID**

Identification of the original public release of this QUBE.

**SOURCE\_PRODUCT\_VERSION\_ID**

Version identification of the QUBE from which this product was derived; available in IRBTR and VISABR.

**START\_TIME**

The time of data acquisition of the leading edge of the detector array (filter 1), even if filter 1 is not downlinked; the difference of STOP\_TIME minus START\_TIME may not be equivalent to IMAGE\_DURATION. Value given in spacecraft event time (SCET), UTC format. [yyyy-mm-ddThh:mm:ss.fff]

**STOP\_TIME**

The time of the end of data acquisition calculated from the sum of the UNCORRECTED\_SCLK\_START\_COUNT and IMAGE\_DURATION; given in spacecraft event time (SCET), UTC format. [yyyy-mm-ddThh:mm:ss.fff]

**SPACECRAFT\_CLOCK\_START\_COUNT**

The value of the spacecraft clock at the time of data acquisition of the leading edge of the detector array (filter 1), even if filter 1 is not downlinked; the difference of SPACECRAFT\_CLOCK\_STOP\_COUNT minus

SPACECRAFT\_CLOCK\_START\_COUNT may not be equivalent to IMAGE\_DURATION. Value given in seconds.

#### SPACECRAFT\_CLOCK\_STOP\_COUNT

The time on the spacecraft clock at the end of data acquisition (in seconds) calculated from the sum of the UNCORRECTED\_SCLK\_START\_COUNT and IMAGE\_DURATION.

#### START\_TIME\_ET

The time of data acquisition of the leading edge of the detector array (filter 1), even if filter 1 is not downlinked; the difference of STOP\_TIME\_ET minus START\_TIME\_ET may not be equivalent to IMAGE\_DURATION. Value given in spacecraft event time (SCET), ET format.

#### STOP\_TIME\_ET

The time of the end of data acquisition calculated from the sum of the UNCORRECTED\_SCLK\_START\_COUNT and IMAGE\_DURATION; given in spacecraft event time (SCET), ET format.

#### SCLKERNEL

The filename of the SPICE SCL-Kernel used when the EDR is created to translate between the fixed spacecraft clock (SCLK) and spacecraft ephemeris time (SCET) time systems. Both observation time values are propagated forward (not recalculated) during each successive processing step. ["ORB1\_SCLKSCET.00###.tsc"]

#### ORBIT\_NUMBER

Spacecraft orbit during which this image was observed.

#### MD5\_CHECKSUM

A 128-bit checksum identification of the data portion of the file. Corruption of the data file will result in a different value when the MD5 algorithm is reapplied as compared to the value stored in the keyword. An example of the source code applied by ASU is available in SRC/BIN/md5\_qube.pl. A complete definition of the MD5 algorithm is available at <http://www.ietf.org/rfc/rfc1321.txt> ["fd2781d05bdc0215dc87a0f41035ad77"]

### ***QUBE STRUCTURE & CORE DESCRIPTION (QUBEs only)***

#### AXES

Number of dimensions (axes) of the QUBE. [3]

#### AXIS\_NAME

Names of axes in physical storage order. [(SAMPLE, LINE, BAND)]

#### CORE\_ITEMS

The length of each of the three axes of the core in pixels.

#### CORE\_NAME

Name of the value stored in core of QUBE. ["RAW\_DATA\_NUMBER" (for EDR) or "CALIBRATED\_SPECTRAL\_RADIANCE" (for RDR)]

#### CORE\_ITEM\_BYTES

Core element size in bytes. [1 (for EDR), 2 (for VISRDR), or 4 (for IRRDR)]

**CORE\_ITEM\_TYPE**

Core element type. [MSB\_UNSIGNED\_INTEGER (for EDR), MSB\_INTEGER (for VISRDR), or SUN\_INTEGER (for IRRDR)]

**CORE\_BASE**

The offset value of the stored data; the CORE\_BASE value is added to the scaled data (see CORE\_MULTIPLIER) to reproduce the true data. For IRRDR QUBEs, see also BAND\_BIN\_BASE.

**CORE\_MULTIPLIER**

The constant value by which the stored data is multiplied to produce the scaled data; the CORE\_BASE value is added to the scaled data to reproduce the true data. For IRRDR QUBEs, see also BAND\_BIN\_MULTIPLIER.

**CORE\_UNIT**

Unit of the value stored in the core of QUBE. [“DIMENSIONLESS” or “WATT\*CM\*\*-2\*SR\*\*-1\*UM\*\*-1”]

**CORE\_NULL**

Value assigned to “invalid” or missing data.

**CORE\_VALID\_MINIMUM**

Value of the minimum valid core data in an RDR QUBE.

**CORE\_LOW\_REPR\_SATURATION**

Value of representation saturation at the low end in an RDR QUBE.

**CORE\_LOW\_INSTR\_SATURATION**

Value of instrument saturation at the low end in an RDR QUBE.

**CORE\_HIGH\_REPR\_SATURATION**

Value of representation saturation at the high end in an RDR QUBE.

**CORE\_HIGH\_INSTR\_SATURATION**

Value of instrument saturation at the high end in an RDR QUBE.

***SUFFIX DESCRIPTION (IR-RDR QUBEs only)*****SUFFIX\_ITEMS**

The dimensions of available suffix planes following the order given in AXIS\_NAME keyword. For PRODUCT\_VERSION\_ID = 1.x, the dimensions will be (1, 1, 0) and all of the *AXIS\_\** keywords below will be included in the label; the data can be extracted from the file using appropriate methods. For PRODUCT\_VERSION\_ID = 2.x, the dimensions will be (0, 0, 0) and only the SUFFIX\_BYTES keyword will be included in the label; there is no suffix data in the file.

**SUFFIX\_BYTES**

The allocation in bytes of each suffix plane defined. [v1.x = 4; v2.x = 0]

**AXIS\_SUFFIX\_NAME**

Name of “axis” suffix plane, where “axis” can be either SAMPLE or LINE in IRRDR QUBEs. [HORIZONTAL\_DESTRIPE (for SAMPLE suffix planes) or VERTICAL\_DESTRIPE (for LINE suffix planes)]

**AXIS\_SUFFIX\_ITEM\_BYTES**

Size of “axis” suffix plane elements in bytes, where “axis” can be either SAMPLE or LINE in IRRDR QUBEs. [2]

**AXIS\_SUFFIX\_ITEM\_TYPE**

“Axis” suffix plane element type, where “axis” can be either SAMPLE or LINE in IRRDR QUBEs. [MSB\_INTEGER]

**AXIS\_SUFFIX\_BASE**

Base value of “axis” suffix plane item scaling, where “axis” can be either SAMPLE or LINE in IRRDR QUBEs.

**AXIS\_SUFFIX\_MULTIPLIER**

Multiplier for “axis” suffix plane item scaling, where “axis” can be either SAMPLE or LINE in IRRDR QUBEs.

**AXIS\_SUFFIX\_VALID\_MINIMUM**

Value of the minimum valid “axis” suffix plane data, where “axis” can be either SAMPLE or LINE in IRRDR QUBEs. [16#FF7FFFA#]

**AXIS\_SUFFIX\_NULL**

Value assigned to “invalid” or missing data in an “axis” suffix plane, where “axis” can be either SAMPLE or LINE in IRRDR QUBEs. [16#FF7FFFB#]

**AXIS\_SUFFIX\_LOW\_REPR\_SATURATION**

Value of representation saturation at the low end in an “axis” suffix plane, where “axis” can be either SAMPLE or LINE in IRRDR QUBEs. [16#FF7FFFC#]

**AXIS\_SUFFIX\_LOW\_INSTR\_SATURATION**

Value of instrument saturation at the low end in an “axis” suffix plane, where “axis” can be either SAMPLE or LINE in IRRDR QUBEs. [16#FF7FFFD#]

**AXIS\_SUFFIX\_HIGH\_REPR\_SATURATION**

Value of representation saturation at the high end in an “axis” suffix plane, where “axis” can be either SAMPLE or LINE in IRRDR QUBEs. [16#FF7FFFF#]

**AXIS\_SUFFIX\_HIGH\_INSTR\_SATURATION**

Value of instrument saturation at the high end in an “axis” suffix plane, where “axis” can be either SAMPLE or LINE in IRRDR QUBEs. [16#FF7FFFFE#]

***OBSERVATION PARAMETERS (QUBEs only)*****FLIGHT\_SOFTWARE\_VERSION\_ID**

Indicates version of instrument flight software used to acquire image. [“1.00”]

**COMMAND\_SEQUENCE\_NUMBER**

Numeric identifier for the sequence of commands sent to the spacecraft which include this image.

**IMAGE\_ID**

Numeric identifier for this image within the onboard command sequence.

**DESCRIPTION**

Description of image written by mission planner.

**INST\_CMPRS\_RATIO**

The ratio of the size, in bytes, of the uncompressed data file to the compressed data file.

**UNCORRECTED\_SCLK\_START\_COUNT**

The spacecraft clock value (in seconds) when the instrument was commanded to acquire an observation. This can differ from the SPACECRAFT\_CLOCK\_START\_COUNT (or the other START\_TIME keywords) by as much as 4 seconds, depending on which bands are acquired in the image.

**IMAGE\_DURATION**

The length of time (in seconds) required to collect all frames of all bands in the downlinked image.

**INST\_CMPRS\_NAME**

The type of compression applied to the VIS data and removed before storage in the image QUBE. [“NONE” or “DCT” or “PREDICTIVE”]

**FOCAL\_PLANE TEMPERATURE**

Temperature in Kelvin of the VIS camera focal plane array at the time of the observation.

**EXPOSURE\_DURATION**

The length of time the VIS detector array is exposed per frame in an image; given in milliseconds.

**INTERFRAME\_DELAY**

The time between successive frames of a VIS image; given in seconds.

**GAIN\_NUMBER**

The gain value of the THEMIS IR camera; a multiplicative factor used in the analog to digital conversion.

**OFFSET\_NUMBER**

The offset value of the THEMIS IR camera; the offset value multiplied by a constant voltage is added to the measured voltage in the analog to digital conversion.

**TIME\_DELAY\_INTEGRATION\_FLAG**

Status of onboard algorithm which applies a temporal average of successive lines in an IR image; when enabled, THEMIS TDI averages 16 detector rows to equal one line in an IR image. [“ENABLED” or “DISABLED”]

**RICE\_FLAG**

Status of onboard lossless compression algorithm applied before downlinking IR images. [“ENABLED” or “DISABLED”]

**PARTIAL\_SUM\_LINES**

The number of lines in a summed IR image which were produced by averaging less than N lines of the original non-summed image, where N is the value of the SPATIAL\_SUMMING keyword. [“N/A” for spatial\_summing=1 or integer for spatial\_summing > 1]

**SPATIAL\_SUMMING**

Onboard spatial average of NxN set of pixels, where N is the value of the keyword. SPATIAL\_SUMMING = 1 implies that no spatial averaging has been applied to the image. [VIS: 1, 2, or 4; IR: 1 through 320]

**MISSING\_SCAN\_LINES**

The total number of scan lines missing from an IR image when it was received at Earth.

***BAND-BINS (QUBEs only)*****BAND\_BIN\_FILTER\_NUMBER**

List of filter numbers corresponding to each layer (band) contained in the image; up to 10 entries possible for IR images and up to 5 entries possible for VIS images. The filter number describes the physical location of the band in the detector array; filter 1 is on the leading edge of the detector array.

**BAND\_BIN\_BAND\_NUMBER**

List of band numbers corresponding to each layer (band) contained in the image; up to 10 entries possible for IR images and up to 5 entries possible for VIS images. The band number is equivalent to the instrument band number listed in Table 1, Section 2.2 of this document (THM-SDPSIS).

**BAND\_BIN\_CENTER**

List of wavelength values corresponding to each layer (band) contained in the image; up to 10 entries possible for IR images and up to 5 entries possible for VIS images.

**BAND\_BIN\_WIDTH**

Calculated full width, half maximum (in micrometers) for each band listed in the BAND\_BIN\_BAND\_NUMBER.

**BAND\_BIN\_UNIT**

Unit which applies to the values of the BAND\_BIN\_CENTER keyword. ["MICROMETER"]

**BAND\_BIN\_BASE**

The offset value for the stored data of each band listed in the BAND\_BIN\_BAND\_NUMBER. The BAND\_BIN\_BASE value is added to the scaled data (see BAND\_BIN\_MULTIPLIER) to reproduce the true data.

**BAND\_BIN\_MULTIPLIER**

The constant value by which the stored data of each band listed in the BAND\_BIN\_BAND\_NUMBER is multiplied to produce the scaled data; the BAND\_BIN\_BASE value is added to the scaled data to reproduce the true data.

**GEOMETRIC PARAMTERS (IMAGEs only)****GEOMETRY\_SOURCE\_DESC**

Description of the geometry kernels used by the ISIS software when generating geometric information for this image. [“Not Available” or “Predicted” or “Reconstructed” or “Nadir pointing assumed”]

**CENTER\_LATITUDE**

Approximate latitude on the planet Mars at the image center.

**CENTER\_LONGITUDE**

Approximate longitude on the planet Mars at the image center.

**POSITIVE\_LONGITUDE\_DIRECTION**

The direction of positive longitude for the coordinate system of the given CENTER\_LONGITUDE measurement.

**SAMPLE\_RESOLUTION**

The horizontal size of a pixel at the center of the image as projected onto the surface of the target; units are given with the value.

**LINE\_RESOLUTION**

The vertical size of a pixel at the center of the image as projected onto the surface of the target; units are given with the value.

**PIXEL\_ASPECT\_RATIO**

Ratio of the height (LIINE\_RESOLUTION) to the width (SAMPLE\_RESOLUTION) of the projection of the pixel onto the surface of the target.

**PHASE\_ANGLE**

The angle between the Sun, surface, and THEMIS at the time the image was acquired.

**INCIDENCE\_ANGLE**

The angle between the Sun and a “normal” drawn perpendicular to the surface of the planet at the center of the image for the time the image was acquired. An INCIDENCE\_ANGLE of approximately 0° indicates that the Sun was directly overhead at the time the image was acquired.

**EMISSION\_ANGLE**

The angle between THEMIS and a “normal” drawn perpendicular to the planet’s surface at the center of the image. For nadir observations, EMISSION\_ANGLE will be approximately 0°.

**NORTH\_AZIMUTH**

The clockwise angle from an imaginary three o’clock axis to the North polar axis where the origin of both axes is at the center of a pixel at the center of the image.

**SLANT\_DISTANCE**

A measure of the distance from the spacecraft to the target body at the center of the image; this value is the spacecraft altitude if the emission angle is 0°.

**LOCAL\_TIME**

The local time on Mars at the center of the image relative to a division of the Martian day into 24 equal parts. A single Martian day is slightly longer than 24 hours and 37 minutes.

**SOLAR\_LONGITUDE**

The position of Mars relative to the Sun as measured in degrees from the vernal equinox; also known as heliocentric longitude.

**SUB\_SOLAR\_AZIMUTH**

The clockwise angle from an imaginary three o'clock axis with the origin at the center of a pixel at the center of the image to the Sun at the time the image was acquired.

***IMAGE STRUCTURE & DATA DESCRIPTION(IMAGEs only)*****UNCORRECTED\_SCLK\_START\_COUNT**

The spacecraft clock value (in seconds) when the instrument was commanded to acquire an observation. This can differ from the SPACECRAFT\_CLOCK\_START\_COUNT (or the other START\_TIME keywords) by as much as 4 seconds, depending on which bands are acquired in the image.

**IMAGE\_DURATION**

The length of time (in seconds) required to collect all frames of all bands in the downlinked image.

**MAXIMUM\_BRIGHTNESS\_TEMPERATURE**

Maximum brightness temperature value measured within the image.

**MINIMUM\_BRIGHTNESS\_TEMPERATURE**

Minimum brightness temperature value measured within the image.

**BAND\_NUMBER**

Identifies from which band in the source RDR this image was derived; see Table 1, Section 2.2 of this document (THM-SDPSIS).

**BAND\_CENTER**

The wavelength value of the band contained in the image; units are given in < > with the value.

**EXPOSURE\_DURATION**

The length of time the VIS detector array is exposed per frame in an image; given in milliseconds.

**INTERFRAME\_DELAY**

The time between successive frames of a VIS image; given in seconds.

**SPATIAL\_SUMMING**

Onboard spatial average of NxN set of pixels, where N is the value of the keyword. SPATIAL\_SUMMING = 1 implies that no spatial averaging has been applied to the image. IR images are expanded out to a standard 320 pixels wide before the BTR is generated; the LINE\_RESOLUTION and SAMPLE\_RESOLUTION keywords are adjusted for the original summing factor. [VIS: 1, 2, or 4; IR: 1 through 320]

**LINES**

Total number of data pixels along the vertical axis of the image.

**LINE\_SAMPLES**

Total number of data pixels along the horizontal axis of the image.



**SAMPLE\_TYPE**

Data storage representation of a pixel value [ UNSIGNED\_INTEGER ]

**SAMPLE\_BITS**

Stored number of bits in a single pixel value.

**ODY:SAMPLE\_NAME**

Identifies the scientific meaning of each pixel value  
["BRIGHTNESS\_TEMPERATURE"]

**ODY:SAMPLE\_UNIT**

Identifies the scientific unit of each pixel value [ "KELVIN" ]

**OFFSET**

The offset value of the stored data; the offset value is added to the scaled data to reproduce the true data.

**SCALING\_FACTOR**

The constant value by which the stored data is multiplied to produce the scaled data; the offset value is added to the scaled data to reproduce the true data.

**A.8 HISTORY Object Items and Examples**

The HISTORY data object is described within the THM-EDR and THM-RDR labels by the following keywords:

**BYTES**

Number of bytes in the HISTORY object.

**HISTORY\_TYPE**

Identifies the software compliance of the HISTORY object format. [CUSTOM]

**INTERCHANGE\_FORMAT**

Identifies the manner in which the HISTORY object data items are stored. [ASCII]

Each program that operates on the data product will generate a new "history entry" and will concatenate the new entry onto the existing HISTORY object. All HISTORY objects follow this basic format, where the values have been replaced with keyword descriptions:

<b>GROUP</b>	= <i>The name of the program that generated the history entry.</i>
<b>DATE_TIME</b>	= <i>Date and time, in UTC standard format, that the program was executed. [yyyy-mm-ddThh:mm:ss]</i>
<b>SOFTWARE_DESC</b>	= <i>Program generated description and execution notes.</i>
<b>VERSION_ID</b>	= <i>Program version number.</i>
<b>USER_NAME</b>	= <i>Username and name of computer. ["smith@east"]</i>
<b>USER_NOTE</b>	= <i>User supplied brief description of program; may be blank.</i>
<b>GROUP</b>	= <i>Used to delineate the statements specifying the parameters of the program; will not be present if additional keywords are not required.</i>
	[PARAMETERS]
<b>KEYWORD</b>	= <i>Value.</i>

```

    END_GROUP                = [PARAMETERS]
END_GROUP                    = The name of the program that generated the history entry.
END

```

Specific examples of the HISTORY objects used in THEMIS QUBEs are shown below.

### ***THM-EDR HISTORY OBJECT***

```

GROUP                        = SFDU2CUBE
  DATE_TIME                  = 2006-12-01T00:00:00
  SOFTWARE_DESC              = "Translation of data format from SFDU into raw image
                              QUBE (THM-EDR). Removes SFDU headers and
                              unpackages data; returns an individual spectral image
                              QUBE (THM-EDR) containing raw DN, with missing data
                              CORE_NULL filled and an attached PDS label."
  VERSION_ID                 = 1.67
  USER_NAME                  = "murray@c100"
  USER_NOTE                  = ""

GROUP                        = PARAMETERS
  START_SFIDU_ID             = "689179146"
  STOP_SFIDU_ID              = "689179206"
  ERT_START_TIME             = "2001=306 // 14:38:30"
  ERT_STOP_TIME              = "2001=306 // 14:39:30"
  MISSING_PACKETS            = 0
  FOUND_PACKETS              = 169
  END_GROUP                  = PARAMETERS
END_GROUP                    = SFDU2CUBE

```

### ***IR-RDR HISTORY OBJECT***

```

GROUP                        = CAL_IR_IMAGE
  DATE_TIME                  = 2007-01-01T00:00:00
  SOFTWARE_DESC              = "Calibration of a raw, infrared image (IREDR). Uses DN,
                              gain, and offset values from raw image with the instrument
                              response function and a calibration flag image (IREDR);
                              returns a calibrated spectral radiance image (IRDR) in (W
                              cm-2 str-1 μm-1)."
  VERSION_ID                 = 5.00
  USER_NAME                  = "murray@c150"
  USER_NOTE                  = ""

GROUP                        = PARAMETERS
  IREDR_FILE                  = "I0013007EDR.QUB"
  IR_IMG_CAL_QUBE_VER        = 5.00
  IRF_FILE                    = "/themis/calib/irf_fit_all_v3.0_tv6_1_2_v3.0"
  TEMP2RAD_FILE              = "/themis/calib/temp_rad_v4"
  CALIB_FLAG_IMAGE           = "S0013008EDR.QUB"

```

CALIB\_FLAG\_DN = (193.034, 193.656, 193.353, 192.725, 192.453,  
 193.044, 193.044, 193.044, 193.044, 193.044)  
 CALIB\_FLAG\_FILTER = 1  
 CALIB\_FLAG\_OPTION = 2  
 CALIB\_FLAG\_TEMP = -7.66  
 DESTRIPE\_OPTION\_X = 3  
 DESTRIPE\_OPTION\_Y = 3  
 DESTRIPE\_FILTER\_X = 9  
 DESTRIPE\_FILTER\_Y = 9  
 STRAYLIGHT\_GEOMETRY = "Reconstructed"  
 STRAYLIGHT\_XDELTA = (0, 0, 3, 3, 3, 3, 1, 1, 0, 0)  
 STRAYLIGHT\_YOFFSET = (0, 0, 349, 299, 249, 202, 152, 103, 0, 0)  
 STRAYLIGHT\_DEFOCUS\_FILTER = (0, 0, 29, 25, 21, 15, 9, 5, 0, 0)  
 STRAYLIGHT\_TDI\_SMEAR\_FILTER = (1.000, 0.000, 1.000, 0.000, 1.000, 0.000,  
 1.000, 0.000, 1.000, 0.000, 1.000, 0.000,  
 1.000, 0.000, 1.000, 0.000, 1.000, 0.000,  
 1.000, 0.000, 1.000, 0.000, 1.000, 0.000,  
 1.000, 0.000)  
 STRAYLIGHT\_PERCENT = (0.00, 0.00, 2.00, 4.50, 6.00, 5.50, 5.00, 5.00, 0.00,  
 0.00)  
 END\_GROUP = PARAMETERS  
 END\_GROUP = CAL\_IR\_IMAGE

### ***VIS-RDR HISTORY OBJECT***

GROUP = CAL\_VIS\_IMAGE  
 DATE\_TIME = 2005-05-01T00:00:00  
 SOFTWARE\_DESC = "Calibration of a raw, visible image (VISED).  
 Calibration includes 8-bit to 11-bit decoding, removal of  
 instrumental effects, and conversion to spectral radiance  
 (W cm-2 str-1 micron-1). The instrumental effects  
 considered are detector bias, register stray light, phososite  
 stray light, and variations in pixel sensitivity (i.e., 'flatfield'  
 effects). Spectral radiance is calculated from the exposure  
 time and from the decoded, instrumentally corrected DN  
 levels of the raw image, using conversion factors  
 (BAND\_BIN\_SENSITIVITY) derived from pre-flight  
 tests. For additional details, see CALIB/PROCESS.PDF."  
 VERSION\_ID = 4.00  
 USER\_NAME = "smith@mars"  
 USER\_NOTE = ""  
 GROUP = PARAMETERS  
 BIAS\_FILE = "/themis/data/zeroframe1\_bias.fits"  
 BIAS\_FILE\_DATE = 2004-07-13T21:29:07  
 DESMEAR\_FILE = ""/themis/data/zeroframe1\_zero.fits  
 DESMEAR\_FILE\_DATE = 2004-07-13T21:29:50

```

FLATFIELD_FILE           = "/themis/data/flat_frames11_prof1.fits"
FLATFIELD_FILE_DATE     = 2005-03-16T04:54:55
STRAY_LIGHT_FILE        = ""/themis/data/destray11_frame1_v1.fits
STRAY_LIGHT_FILE_DATE   = 2005-03-16T19:20:58
STRAY_LIGHT_REMOVAL_VERSION = 8
BAND_BIN_MODEL_COEFF    = (3.8154E-06, 3.7681E-06, 3.5121E-06, 5.0476E-
                          06, 1.4836E-05)
BAND_BIN_MODEL_COEFF_UNITS = "
                          (WATT*CM**-2*SR**-1*UM**-1)/(DN*MSEC**-1)"
BAND_BIN_SMEAR_COEFF    = 45100.0
BAND_BIN_SMEAR_COEFF_UNITS = "DN/(WATT*CM**-2*SR**-1*UM**-1)"
BAND_BIN_STRAY_LIGHT_SENSITIVITY = (2850., 2850., 2850., 2850.,
                          14300.)
BAND_BIN_SENSITIVITY    = (42700., 61850., 57600., 22450., 6500.)
BAND_BIN_SENSITIVITY_UNITS = "(DN*MSEC**-1) per
                          (WATT*CM**-2*SR**-1*UM**-1)"

END_GROUP                = PARAMETERS
END_GROUP                = SFDU2CUBE

```

### ***ERRATA HISTORY OBJECT***

```

GROUP                    = ERRATA_ODTIE_0001_1_1
DATE_TIME                = "2002-11-11T00:00:00"
SOFTWARE_DESC            = "SFDU2CUBE version 1.56 update includes several
                          modifications to the headers of all THEMIS EDR QUBEs.
                          This SFDU2CUBE version also includes improved sfd
                          stream processing of corrupted packets.

```

The keyword RELEASE\_ID was added to the PDS label attached to all THEMIS EDR QUBE objects.

```

Associated ERRATA_ID: ODTVE_0001-1.1"
ERRATA_ID                = "ODTIE-0001-1.1"
USER_NAME                = "murray@c150"
USER_NOTE                = ""
END_GROUP                = ERRATA_ODTIE_0001_1_1

```

### **A.9 Telemetry Table Structure (t1m.fmt)**

```

COLUMNS                 = 41
ROW_BYTES                = 46
INTERCHANGE_FORMAT      = BINARY
DESCRIPTION              = "

```

The TLM table stores the THEMIS telemetry parameters downlinked with all IR images in the housekeeping telemetry data frame. One record in the TLM table represents one housekeeping telemetry data frame. For each requested IR image, one housekeeping telemetry data frame is collected immediately preceding the first image data frame, another is

collected every 2048 data frames (68.267 seconds) throughout the image, and a final one is collected after the last image data frame.

Bytes 7, 9-(bits 1-6), 11-(bits 12,4, 9-16), 41, 43-(bits 1-4), and 44-(bits 1-2) are spares reserved for future use with a value set to either 0 or 1. Valid values are defined between [ ] in the column description, as appropriate.”

OBJECT	= COLUMN
NAME	= SYNC
DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BYTE	= 1
BYTES	= 2
DESCRIPTION	= “Indicates frame synchronization at the beginning of each frame. [1111 0000 1100 1010]”
END_OBJECT	= COLUMN
OBJECT	= COLUMN
NAME	= IMAGE_ID
DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BYTE	= 3
BYTES	= 1
DESCRIPTION	= “Number of image counted sequentially within each orbit.”
END_OBJECT	= COLUMN
OBJECT	= COLUMN
NAME	= TELEMETRY_TYPE
DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BYTE	= 4
BYTES	= 1
DESCRIPTION	= “Identifies packet within datastream as a telemetry frame. [0000 1111] = frame from start or middle of an image [0000 1110] = frame from end of image”
END_OBJECT	= COLUMN
OBJECT	= COLUMN
NAME	= FRAME_COUNT
DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BYTE	= 5
BYTES	= 2
DESCRIPTION	= “Frame count from start of image acquisition; increments by 2048 for telemetry frames collected in the middle of the image.”
END_OBJECT	= COLUMN
OBJECT	= COLUMN
NAME	= SPARE7
DATA_TYPE	= MSB_UNSIGNED_INTEGER

START_BYTE	= 7
BYTES	= 1
DESCRIPTION	= "Reserved for future use"
END_OBJECT	= COLUMN
OBJECT	= COLUMN
NAME	= IMAGE_LENGTH
DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BYTE	= 8
BYTES	= 1
DESCRIPTION	= "Command value used to define the final size of the image in frames; final image is determined using: (IMAGE_LENGTH+1)*256)-240. [1:255]"
END_OBJECT	= COLUMN
OBJECT	= COLUMN
NAME	= BAND_ENABLED
DATA_TYPE	= MSB_BIT_STRING
START_BYTE	= 9
BYTES	= 2
DESCRIPTION	= "Bit-word defining the band mask used for this image."
OBJECT	= BIT_COLUMN
NAME	= SPARE9_1
BIT_DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BIT	= 1
BITS	= 6
DESCRIPTION	= "Reserved for future use"
END_OBJECT	= BIT_COLUMN
OBJECT	= BIT_COLUMN
NAME	= BAND_MASK
BIT_DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BIT	= 7
BITS	= 10
DESCRIPTION	= "Flag indicating whether the band is ON [1] or OFF [0]; one bit per band, stored numerically according to band number (e.g. bit 7 = Band 1, bit 8 = Band 2 ... bit 16 = Band 10)."
END_OBJECT	= BIT_COLUMN
END_OBJECT	= COLUMN
OBJECT	= COLUMN
NAME	= IRS_STATUS
DATA_TYPE	= MSB_BIT_STRING
START_BYTE	= 11
BYTES	= 2

DESCRIPTION	= “Bit-word defining calibration flag and latchup status for this image; see individual bit items below”
OBJECT	= BIT_COLUMN
NAME	= CALIB_FLAG_PRIMARY
BIT_DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BIT	= 1
BITS	= 1
DESCRIPTION	= “Status of calibration flag primary motor control (from IRS). [0] = Closed [1] = Open”
END_OBJECT	= BIT_COLUMN
OBJECT	= BIT_COLUMN
NAME	= SPARE11_2
BIT_DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BIT	= 2
BITS	= 1
DESCRIPTION	= “Reserved for future use”
END_OBJECT	= BIT_COLUMN
OBJECT	= BIT_COLUMN
NAME	= CALIB_FLAG_REDUNDANT
BIT_DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BIT	= 3
BITS	= 1
DESCRIPTION	= “Status of calibration flag redundant motor control (from IRS). [0] = Closed [1] = Open”
END_OBJECT	= BIT_COLUMN
OBJECT	= BIT_COLUMN
NAME	= SPARE11_4
BIT_DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BIT	= 4
BITS	= 1
DESCRIPTION	= “Reserved for future use”
END_OBJECT	= BIT_COLUMN
OBJECT	= BIT_COLUMN
NAME	= LATCHUP_SENSITIVITY
BIT_DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BIT	= 5
BITS	= 1
DESCRIPTION	= “Latchup control circuit sensitivity state (from IRS). [0] = Low

```

                                [1] = High”
END_OBJECT                      = BIT_COLUMN

OBJECT                          = BIT_COLUMN
  NAME                          = LATCHUP_TRIGGER
  BIT_DATA_TYPE                 = MSB_UNSIGNED_INTEGER
  START_BIT                     = 6
  BITS                          = 1
  DESCRIPTION                   = “Latchup protection circuit status (from IRS).
                                [0] = Off
                                [1] = On”
END_OBJECT                      = BIT_COLUMN

OBJECT                          = BIT_COLUMN
  NAME                          = RICE
  BIT_DATA_TYPE                 = MSB_UNSIGNED_INTEGER
  START_BIT                     = 7
  BITS                          = 1
  DESCRIPTION                   = “Status of onboard, lossless compression algorithm
                                [0] = Enabled
                                [1] = Disabled”
END_OBJECT                      = BIT_COLUMN

OBJECT                          = BIT_COLUMN
  NAME                          = TDI_ENABLE
  BIT_DATA_TYPE                 = MSB_UNSIGNED_INTEGER
  START_BIT                     = 8
  BITS                          = 1
  DESCRIPTION                   = “Status of onboard Time Delay Integration (TDI)
                                algorithm
                                [0] = Off
                                [1] = On”
END_OBJECT                      = BIT_COLUMN

OBJECT                          = BIT_COLUMN
  NAME                          = SPARE11_9
  BIT_DATA_TYPE                 = MSB_UNSIGNED_INTEGER
  START_BIT                     = 9
  BITS                          = 8
  DESCRIPTION                   = “Reserved for future use”
END_OBJECT                      = BIT_COLUMN
END_OBJECT                      = COLUMN

OBJECT                          = COLUMN
  NAME                          = SECONDARY_MIRROR_TEMP
  DATA_TYPE                   = MSB_UNSIGNED_INTEGER
  START_BYTE                   = 13
  BYTES                        = 1

```



OFFSET	= -50
SCALING_FACTOR	= 0.3195
UNIT	= "C"
DESCRIPTION	= "Secondary mirror temperature."
END_OBJECT	= COLUMN
OBJECT	= COLUMN
NAME	= PRIMARY_MIRROR_TEMP
DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BYTE	= 14
BYTES	= 1
OFFSET	= -50
SCALING_FACTOR	= 0.3195
UNIT	= "C"
DESCRIPTION	= "Primary mirror temperature."
END_OBJECT	= COLUMN
OBJECT	= COLUMN
NAME	= FLAG_TEMP
DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BYTE	= 15
BYTES	= 1
OFFSET	= -50
SCALING_FACTOR	= 0.3195
UNIT	= "C"
DESCRIPTION	= "Calibration flag assembly temperature."
END_OBJECT	= COLUMN
OBJECT	= COLUMN
NAME	= IRS_TEMP
DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BYTE	= 16
BYTES	= 1
OFFSET	= -50
SCALING_FACTOR	= 0.3195
UNIT	= "C"
DESCRIPTION	= "Infrared Subsystem (IRS) electronics temperature."
END_OBJECT	= COLUMN
OBJECT	= COLUMN
NAME	= IR_TEMP
DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BYTE	= 17
BYTES	= 1
OFFSET	= -50
SCALING_FACTOR	= 0.3195
UNIT	= "C"
DESCRIPTION	= "Infrared detective assembly (IRDA) temperature."
END_OBJECT	= COLUMN

```

OBJECT                = COLUMN
  NAME                = BEAMSPLITTER_TEMP
  DATA_TYPE          = MSB_UNSIGNED_INTEGER
  START_BYTE         = 18
  BYTES               = 1
  OFFSET              = -50
  SCALING_FACTOR      = 0.3195
  UNIT                = "C"
  DESCRIPTION         = "Dichroic beamsplitter assembly temperature."
END_OBJECT            = COLUMN

OBJECT                = COLUMN
  NAME                = TERT_MIRROR_TEMP
  DATA_TYPE          = MSB_UNSIGNED_INTEGER
  START_BYTE         = 19
  BYTES               = 1
  OFFSET              = -50
  SCALING_FACTOR      = 0.3195
  UNIT                = "C"
  DESCRIPTION         = "Tertiary mirror temperature."
END_OBJECT            = COLUMN

OBJECT                = COLUMN
  NAME                = IRIS_1_TEMP
  DATA_TYPE          = MSB_UNSIGNED_INTEGER
  START_BYTE         = 20
  BYTES               = 1
  OFFSET              = -50
  SCALING_FACTOR      = 0.3195
  UNIT                = "C"
  DESCRIPTION         = "Infrared Imaging System (IRIS) housing temperature from
                        sensor 1."
END_OBJECT            = COLUMN

OBJECT                = COLUMN
  NAME                = IRIS_2_TEMP
  DATA_TYPE          = MSB_UNSIGNED_INTEGER
  START_BYTE         = 21
  BYTES               = 1
  OFFSET              = -50
  SCALING_FACTOR      = 0.3195
  UNIT                = "C"
  DESCRIPTION         = "Infrared Imaging System (IRIS) housing temperature from
                        sensor 2."
END_OBJECT            = COLUMN

OBJECT                = COLUMN
  NAME                = BAFFLE_TEMP
  DATA_TYPE          = MSB_UNSIGNED_INTEGER

```

```

START_BYTE           = 22
BYTES                = 1
OFFSET               = -50
SCALING_FACTOR       = 0.3195
UNIT                 = "C"
DESCRIPTION           = "Main baffle temperature."
END_OBJECT           = COLUMN

OBJECT               = COLUMN
NAME                 = CONVERTER_P12V
DATA_TYPE            = MSB_UNSIGNED_INTEGER
START_BYTE           = 23
BYTES                = 1
OFFSET               = -1.4634
SCALING_FACTOR       = 0.09565
UNIT                 = "VOLT"
DESCRIPTION           = "+12V voltage measurement at DC/DC converter."
END_OBJECT           = COLUMN

OBJECT               = COLUMN
NAME                 = CONVERTER_P5V
DATA_TYPE            = MSB_UNSIGNED_INTEGER
START_BYTE           = 24
BYTES                = 1
OFFSET               = -1.439
SCALING_FACTOR       = 0.02869
UNIT                 = "VOLT"
DESCRIPTION           = "+5V voltage measurement at DC/DC converter."
END_OBJECT           = COLUMN

OBJECT               = COLUMN
NAME                 = IRS_P5V
DATA_TYPE            = MSB_UNSIGNED_INTEGER
START_BYTE           = 25
BYTES                = 1
OFFSET               = -15.752
SCALING_FACTOR       = 1.0295
UNIT                 = "mAMP"
DESCRIPTION           = "+5V current measurement of the IRS boards."
END_OBJECT           = COLUMN

OBJECT               = COLUMN
NAME                 = CONVERTER_N12V
DATA_TYPE            = MSB_UNSIGNED_INTEGER
START_BYTE           = 26
BYTES                = 1
OFFSET               = -2.0488
SCALING_FACTOR       = 0.1339
UNIT                 = "VOLT"

```

DESCRIPTION	= "-12V voltage measurement at DC/DC converter."
END_OBJECT	= COLUMN
OBJECT	= COLUMN
NAME	= LMS12_P5V
DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BYTE	= 27
BYTES	= 1
OFFSET	= -3.05
SCALING_FACTOR	= 0.366
UNIT	= "mAMP"
DESCRIPTION	= "+5V current measurement of the latchup protected part, LMS12."
END_OBJECT	= COLUMN
OBJECT	= COLUMN
NAME	= EEPROM_P5V
DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BYTE	= 28
BYTES	= 1
OFFSET	= -3.15
SCALING_FACTOR	= 0.37
UNIT	= "mAMP"
DESCRIPTION	= "+5V current measurement of the latchup protected part, EEPROM."
END_OBJECT	= COLUMN
OBJECT	= COLUMN
NAME	= TEC_TEMP
DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BYTE	= 29
BYTES	= 1
OFFSET	= 0.8019
SCALING_FACTOR	= -0.05241
UNIT	= "VOLT"
DESCRIPTION	= "TE cooler temperature voltage; can be converted into temperature using the Table 8 in THEMIS Command and Data Format Description (SBRC document number Y2393-0007)."
END_OBJECT	= COLUMN
OBJECT	= COLUMN
NAME	= IRIS_P5V
DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BYTE	= 30
BYTES	= 1
OFFSET	= -38.67
SCALING_FACTOR	= 2.6124
UNIT	= "mAMP"

DESCRIPTION	= "+5V current measurement of IRIS electronics, not latchup protected."
END_OBJECT	= COLUMN
OBJECT	= COLUMN
NAME	= TOTAL_P5V
DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BYTE	= 31
BYTES	= 1
DESCRIPTION	= "The total +5V current count for all boards."
END_OBJECT	= COLUMN
OBJECT	= COLUMN
NAME	= TEC_P5V
DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BYTE	= 32
BYTES	= 1
OFFSET	= -19.33
SCALING_FACTOR	= 1.263
UNIT	= "mAMP"
DESCRIPTION	= "+5V current measurement of TE cooler."
END_OBJECT	= COLUMN
OBJECT	= COLUMN
NAME	= IRIS_N12V
DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BYTE	= 33
BYTES	= 1
OFFSET	= -25.14
SCALING_FACTOR	= 2.30
UNIT	= "mAMP"
DESCRIPTION	= "-12V current measurement to the IRIS."
END_OBJECT	= COLUMN
OBJECT	= COLUMN
NAME	= IRIS_P12V
DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BYTE	= 34
BYTES	= 1
OFFSET	= -64.71
SCALING_FACTOR	= 4.23
UNIT	= "mAMP"
DESCRIPTION	= "+12V current measurement to the IRIS."
END_OBJECT	= COLUMN
OBJECT	= COLUMN
NAME	= IRS_N12V
DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BYTE	= 35

```

    BYTES = 1
    OFFSET = -27.93
    SCALING_FACTOR = 2.413
    UNIT = "mAMP"
    DESCRIPTION = "-12V current measurement to the IRS."
END_OBJECT = COLUMN

OBJECT = COLUMN
    NAME = IRS_P12V
    DATA_TYPE = MSB_UNSIGNED_INTEGER
    START_BYTE = 36
    BYTES = 1
    OFFSET = -36.25
    SCALING_FACTOR = 2.96
    UNIT = "mAMP"
    DESCRIPTION = "+12V current measurement to the IRS."
END_OBJECT = COLUMN

OBJECT = COLUMN
    NAME = LATCHUP_V1
    DATA_TYPE = MSB_UNSIGNED_INTEGER
    START_BYTE = 37
    BYTES = 1
    DESCRIPTION = "Comparator output voltage count used to determine state
    of V1 latchup current; compare count to boundaries: <50 =
    FAULT, >220 = OKAY."
END_OBJECT = COLUMN

OBJECT = COLUMN
    NAME = VNSTRIP
    DATA_TYPE = MSB_UNSIGNED_INTEGER
    START_BYTE = 38
    BYTES = 1
    OFFSET = 0.38986
    SCALING_FACTOR = -0.02548
    UNIT = "VOLT"
    DESCRIPTION = "The variable negative bias voltage for the IR focal plane."
END_OBJECT = COLUMN

OBJECT = COLUMN
    NAME = LATCHUP_5V
    DATA_TYPE = MSB_UNSIGNED_INTEGER
    START_BYTE = 39
    BYTES = 1
    DESCRIPTION = "Comparator output voltage count used to determine state
    of 5V IRIS latchup current; compare count to boundaries:
    <50 = FAULT, >220 = OKAY."
END_OBJECT = COLUMN

```

OBJECT	= COLUMN
NAME	= LATCHUP_V2
DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BYTE	= 40
BYTES	= 1
DESCRIPTION	= "Comparator output voltage count used to determine state of V2 latchup current; compare count to boundaries: <50 = FAULT, >220 = OKAY."
END_OBJECT	= COLUMN
OBJECT	= COLUMN
NAME	= SPARE41
DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BYTE	= 41
BYTES	= 1
DESCRIPTION	= "Reserved for future use"
END_OBJECT	= COLUMN
OBJECT	= COLUMN
NAME	= TEC_SHUTDOWN_TEMP
DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BYTE	= 42
BYTES	= 1
DESCRIPTION	= "Comparator output voltage count used to determine TE cooler temperature shutdown; compare count to boundaries: <50 = FAULT, >220 = OKAY."
END_OBJECT	= COLUMN
OBJECT	= COLUMN
NAME	= DIGITAL_WATCHDOG
DATA_TYPE	= MSB_BIT_STRING
START_BYTE	= 43
BYTES	= 1
DESCRIPTION	= "Bit word flag indicating overcurrent or overtemp of the named components."
OBJECT	= BIT_COLUMN
NAME	= SPARE43_1
BIT_DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BIT	= 1
BITS	= 4
DESCRIPTION	= "Reserved for future use"
END_OBJECT	= BIT_COLUMN
OBJECT	= BIT_COLUMN
NAME	= TEC_OVERTEMP
BIT_DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BIT	= 5
BITS	= 1

DESCRIPTION	= "Status of TE cooler temperature. [0] = Overtemp [1] = OK"
END_OBJECT	= BIT_COLUMN
OBJECT	= BIT_COLUMN
NAME	= IRIS_OVERCURRENT
BIT_DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BIT	= 6
BITS	= 1
DESCRIPTION	= "Latchup status of IRIS protected parts current. [0] = Overcurrent [1] = OK"
END_OBJECT	= BIT_COLUMN
OBJECT	= BIT_COLUMN
NAME	= LMS_OVERCURRENT
BIT_DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BIT	= 7
BITS	= 1
DESCRIPTION	= "Latchup status of LMS12 current. [0] = Overcurrent [1] = OK"
END_OBJECT	= BIT_COLUMN
OBJECT	= BIT_COLUMN
NAME	= EEPROM_OVERCURRENT
BIT_DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BIT	= 8
BITS	= 1
DESCRIPTION	= "Latchup status of EEPROM current. [0] = Overcurrent [1] = OK"
END_OBJECT	= BIT_COLUMN
END_OBJECT	= COLUMN
OBJECT	= COLUMN
NAME	= IRIS_STATUS
DATA_TYPE	= MSB_BIT_STRING
START_BYTE	= 44
BYTES	= 1
DESCRIPTION	= "Bit-word indicating calibration flag or latchup status from IRIS electronics."
OBJECT	= BIT_COLUMN
NAME	= SPARE44_1
BIT_DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BIT	= 1



BITS	= 2
DESCRIPTION	= "Reserved for future use"
END_OBJECT	= BIT_COLUMN
OBJECT	= BIT_COLUMN
NAME	= LATCHUP_TRIGGER
BIT_DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BIT	= 3
BITS	= 1
DESCRIPTION	= "Latchup protection circuit status (from IRIS). [0] = On [1] = Off"
END_OBJECT	= BIT_COLUMN
OBJECT	= BIT_COLUMN
NAME	= LATCHUP_SENSITIVITY
BIT_DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BIT	= 4
BITS	= 1
DESCRIPTION	= "Latchup control circuit sensitivity state (from IRIS). [0] = High [1] = Low"
END_OBJECT	= BIT_COLUMN
OBJECT	= BIT_COLUMN
NAME	= CALIB_FLAG_PRI_OPEN
BIT_DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BIT	= 5
BITS	= 1
DESCRIPTION	= "Status of calibration flag primary limit switch for open position (from IRIS). [0] = Open [1] = Not open"
END_OBJECT	= BIT_COLUMN
OBJECT	= BIT_COLUMN
NAME	= CALIB_FLAG_PRI_CLOSE
BIT_DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BIT	= 6
BITS	= 1
DESCRIPTION	= "Status of calibration flag primary limit switch for closed position (from IRIS). [0] = Closed [1] = Not closed "
END_OBJECT	= BIT_COLUMN
OBJECT	= BIT_COLUMN
NAME	= CALIB_FLAG_RDT_OPEN

BIT_DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BIT	= 7
BITS	= 1
DESCRIPTION	= “Status of calibration flag redundant limit switch for open position (from IRIS). [0] = Open [1] = Not open”
END_OBJECT	= BIT_COLUMN
OBJECT	= BIT_COLUMN
NAME	= CALIB_FLAG_RDT_CLOSE
BIT_DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BIT	= 8
BITS	= 1
DESCRIPTION	= “Status of calibration flag redundant limit switch for closed position (from IRIS). [0] = Closed [1] = Not closed ”
END_OBJECT	= BIT_COLUMN
END_OBJECT	= COLUMN
OBJECT	= COLUMN
NAME	= END_SYNC
DATA_TYPE	= MSB_UNSIGNED_INTEGER
START_BYTE	= 45
BYTES	= 2
DESCRIPTION	= “Indicates frame synchronization at the end of each frame. [1010 1011 1000 1100]”
END_OBJECT	= COLUMN